



ALUMINUM NO. PLATE
 ONE DBL. PRONG CEILING
 HOOK & THREE SGL. PRONG
 WALL HOOKS EA. OPENING
 LOCK HOLE COVER PLATE
 STAINLESS STEEL RECESSED
 POCKET WITH PADLOCK EYE

16GA. DOOR & FRAME
 QUIET SOUND DAMPENING
 PANEL

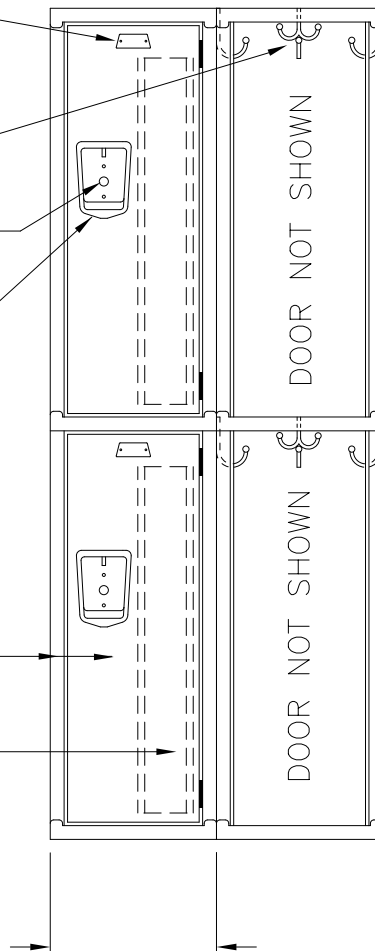

ELEVATION

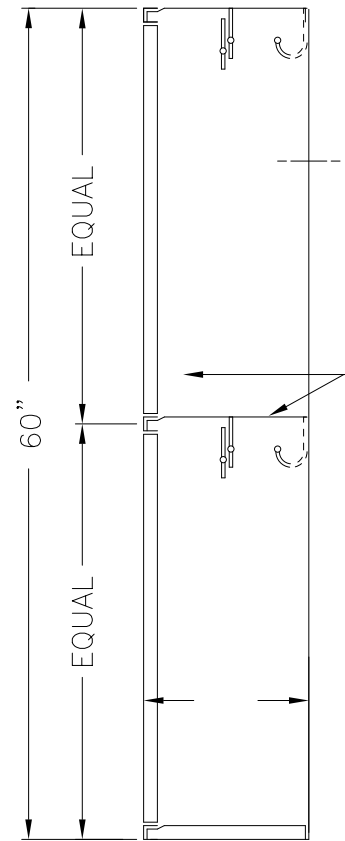

24GA. BODY &
 TIER HEADS

SECTION @ WALL



60" HIGH DOUBLE TIER GUARDIAN KNOCKDOWN LOCKER W/ MEDALLION OPTION

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001

12" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 12", 15", 18", & 21" DEEP



121260GM2T.dwg

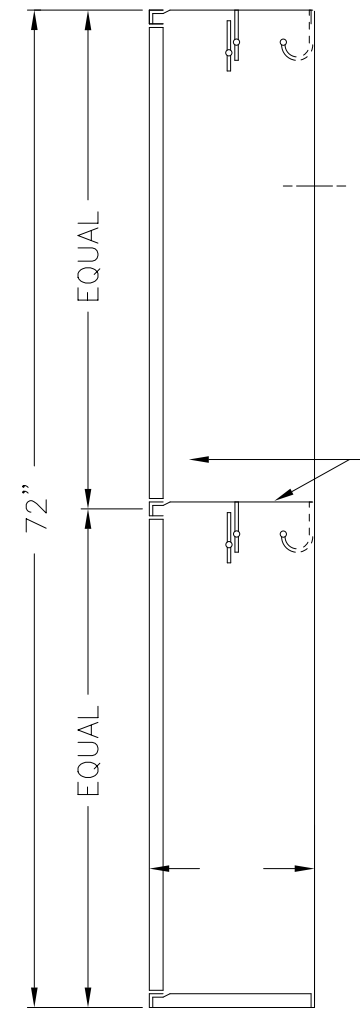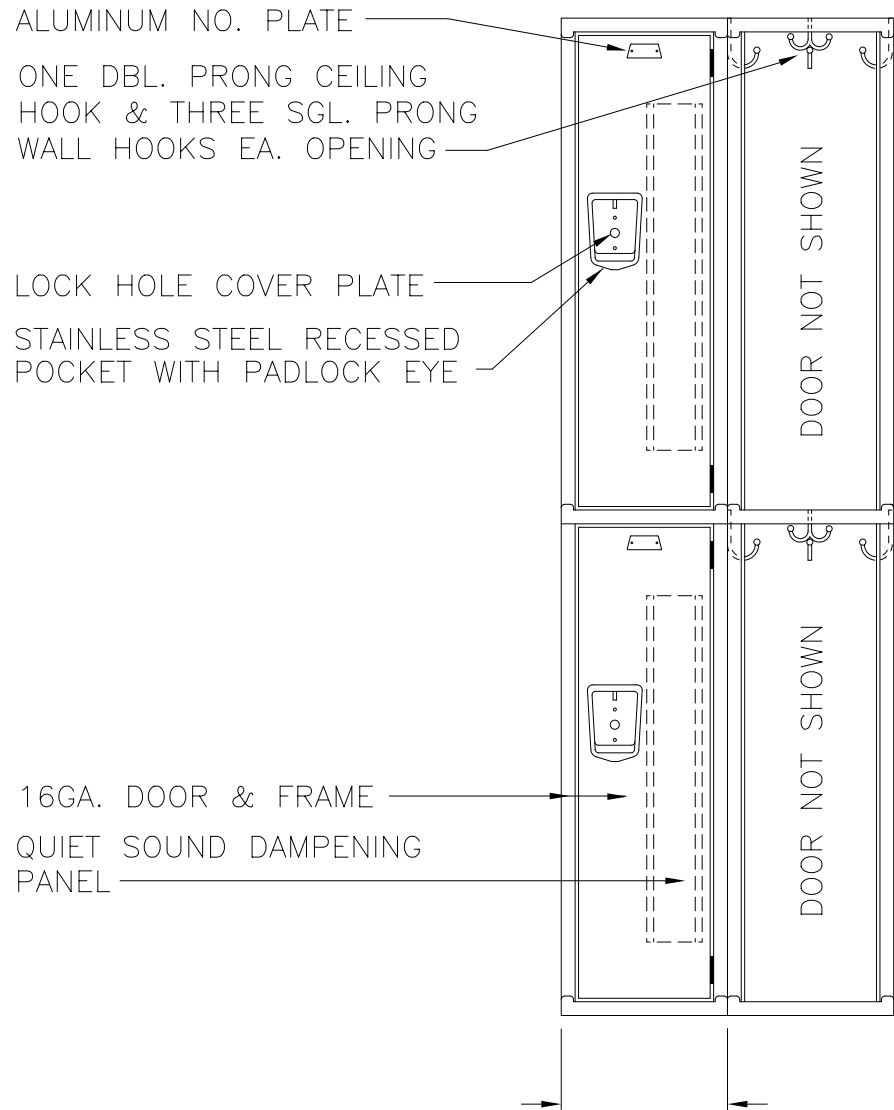

24GA. BODY & TIER HEADS

ELEVATION SECTION @ WALL
 72" HIGH DOUBLE TIER GUARDIAN KNOCKDOWN LOCKER


12" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
 TYPICAL FOR 12", 15", 18", 21" & 24" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001




ALUMINUM NO. PLATE
 ONE DBL. PRONG CEILING
 HOOK & FOUR SGL. PRONG
 WALL HOOKS EA. OPENING
 LOCK HOLE COVER PLATE
 STAINLESS STEEL RECESSED
 POCKET WITH PADLOCK EYE

16GA. DOOR & FRAME
 QUIET SOUND DAMPENING
 PANEL

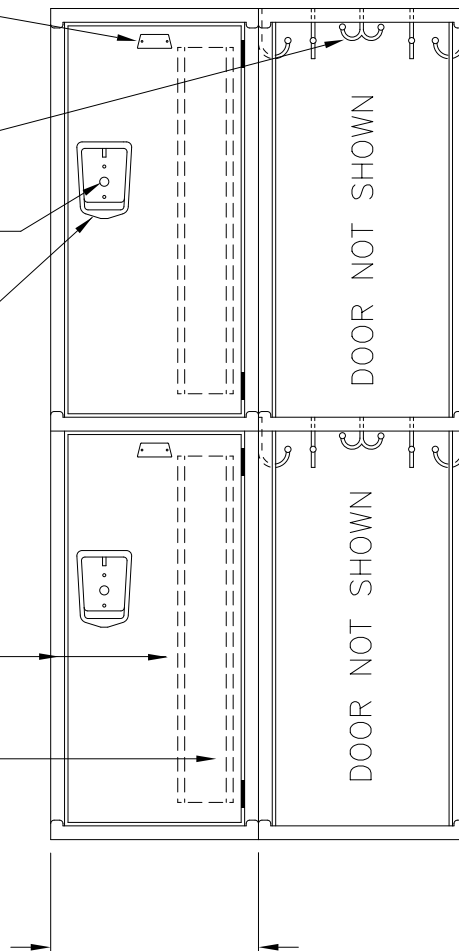

ELEVATION

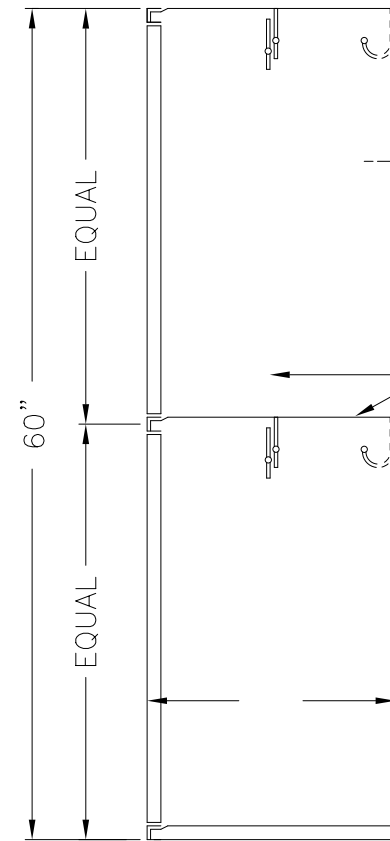

SECTION @ WALL

60" HIGH DOUBLE TIER GUARDIAN KNOCKDOWN LOCKER W/ MEDALLION OPTION

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001

TYPICAL FOR 15" & 18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
 TYPICAL FOR 12", 15", 18", 21", & 24" DEEP



151860GM2T.dwg

ALUMINUM NO. PLATE

ONE DBL. PRONG CEILING
HOOK & FOUR SGL. PRONG
WALL HOOKS EA. OPENING

LOCK HOLE COVER PLATE


STAINLESS STEEL RECESSED
POCKET WITH PADLOCK EYE

16GA. DOOR & FRAME

QUIET SOUND DAMPENING
PANEL

DOOR NOT SHOWN

DOOR NOT SHOWN

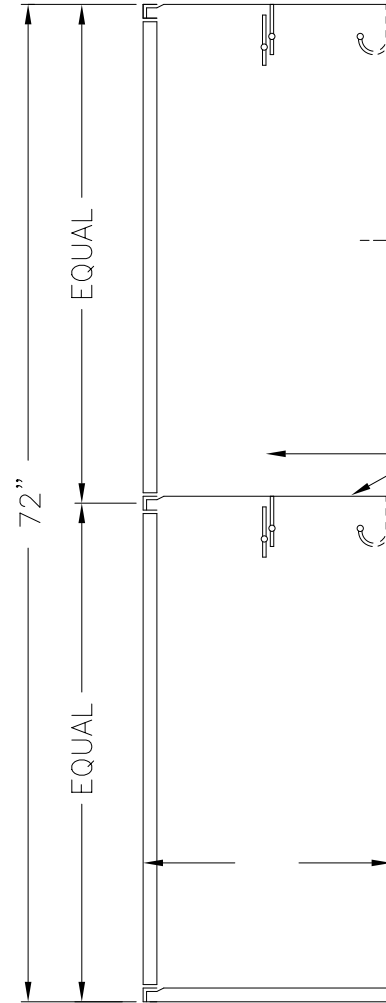

24GA. BODY &
TIER HEADS

ELEVATION

SECTION @ WALL

72" HIGH DOUBLE TIER GUARDIAN KNOCKDOWN LOCKER W/ MEDALLION OPTION

This drawing shows a standard Penco Product. Any modifications
to the product must be approved by Penco Engineering. 8/6/2001

15" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 12", 15", 18", 21", & 24" DEEP



151872GM2T.dwg