

PATRIOT[®]

Duty, Gear and Turnout Lockers



Readiness Done Right!

Penco Lockers

Penco Products, Inc. is a leader in the design, engineering and fabrication of storage products and accessories. With over 145 years of experience manufacturing metal storage products, our products are built to the highest standard of fit, finish and function.

When it comes to lockers, Penco offers the broadest range of steel lockers. From custom built corridor lockers for schools to employee lockers for a wide variety of industries, we engineer each product to fit its intended use.

All Penco Patriot Lockers are manufactured in the United States at our facility in Hamilton, NC with 475,000 square feet of manufacturing capacity.

This facility employs modern metal working equipment and a state-of-the-art powder coat paint system to deliver a product that is second to none.



On the cover:

Penco Patriot Welded Gear Lockers (36" wide x 24" deep x 76" high) with continuous sloping hoods. These lockers are painted in Penco 028 Gray with louvered doors and diamond perforated side.



Available
in 24 Colors
See Page 17

Patriot Duty Lockers

See Page 4

Duty Lockers answer the call with law enforcement and security professionals in mind. A fully equipped interior featuring preconfigured compartments and additional private storage means what you need is where you need it when you need it.

- Construction – Welded or Knocked Down (KD)
- Heights available – 60 or 72”
- Widths available – 18 or 24”
- Ventilation – Perforated top, hat shelf, louvered doors and drawer
- Lockable compartments – Main doors, drawer and interior side compartment
- Hanging – Heavy duty coat rod and hanging hooks
- Latching – Cremone handle
- Electrical Access – Single gang duplex knockout In top panel



Patriot Gear Lockers

See Page 6

When storing bulky protective or tactical gear, the size of the locker you select quickly becomes a factor. Gear models range from 18 inch wide to a massive 48 inches. All come standard with full-height 14 gauge doors, beefy coat hooks and a 1” diameter coat rod.

- Construction – Welded or Knocked Down (KD)
- Height available – 72”. Welded models are 76” with integrated base
- Widths available – 18, 24, 30, 36, 42 or 48”
- Ventilation – Louvered doors and diamond perforated sides
- Lockable compartments – Main doors, optional security box, drawer or footlocker
- Hanging – Heavy duty coat rod and hanging hooks
- Latching – Cremone handle



Patriot Turnout Lockers

See Page 8

Seconds count when it's your job to be the first to respond. The Patriot Turnout Locker shares the same heavy gauge steel construction as the Gear and Duty Lockers, but its open front and smooth frame mean you can retrieve your equipment in a flash.

- Construction – Welded or Knocked Down (KD)
- Heights available – 72” Welded models are 76” with integrated base
- Widths available – 18, 24, 30, 36, 42 or 48”
- Ventilation – Open front and diamond perforated sides
- Lockable compartments – Optional security box, drawer or footlocker
- Hanging – Heavy duty coat rod and hanging hooks
- Latching – Open front



Patriot

Duty Locker

Patriot Duty Locker

Built for law enforcement applications, the big story behind the Duty Locker is actually under it. A 14 gauge welded shell, 16 gauge drawer and ball bearing glides provide at no less than 3.4 cubic feet of usable storage in the Patriot Duty Locker's drawer base. The 33" deep base also accepts individual or continuous lengths of hardwood locker benches for seating (optional).

Distinguishing Features:


- All sizes offered in welded or knocked down (KD) construction
- Factory assembly available on KD models
- 16 gauge interior divider and side shelf
- Ventilation slots on locker top
- Hat shelf ventilated on garment Side
- Heavy duty coat rod and hooks on garment side
- Lockable security compartment
- Duplex knockout on locker top
- 24 inch deep locker with 21 inch deep accessories
- 60 inch and 72 inch heights available
- Available with optional drawer base



About this locker:

Penco Knocked Down (KD) Patriot Duty Lockers are two-toned (non-standard) and feature an optional integrated hardwood bench seat.

Patriot Duty Locker

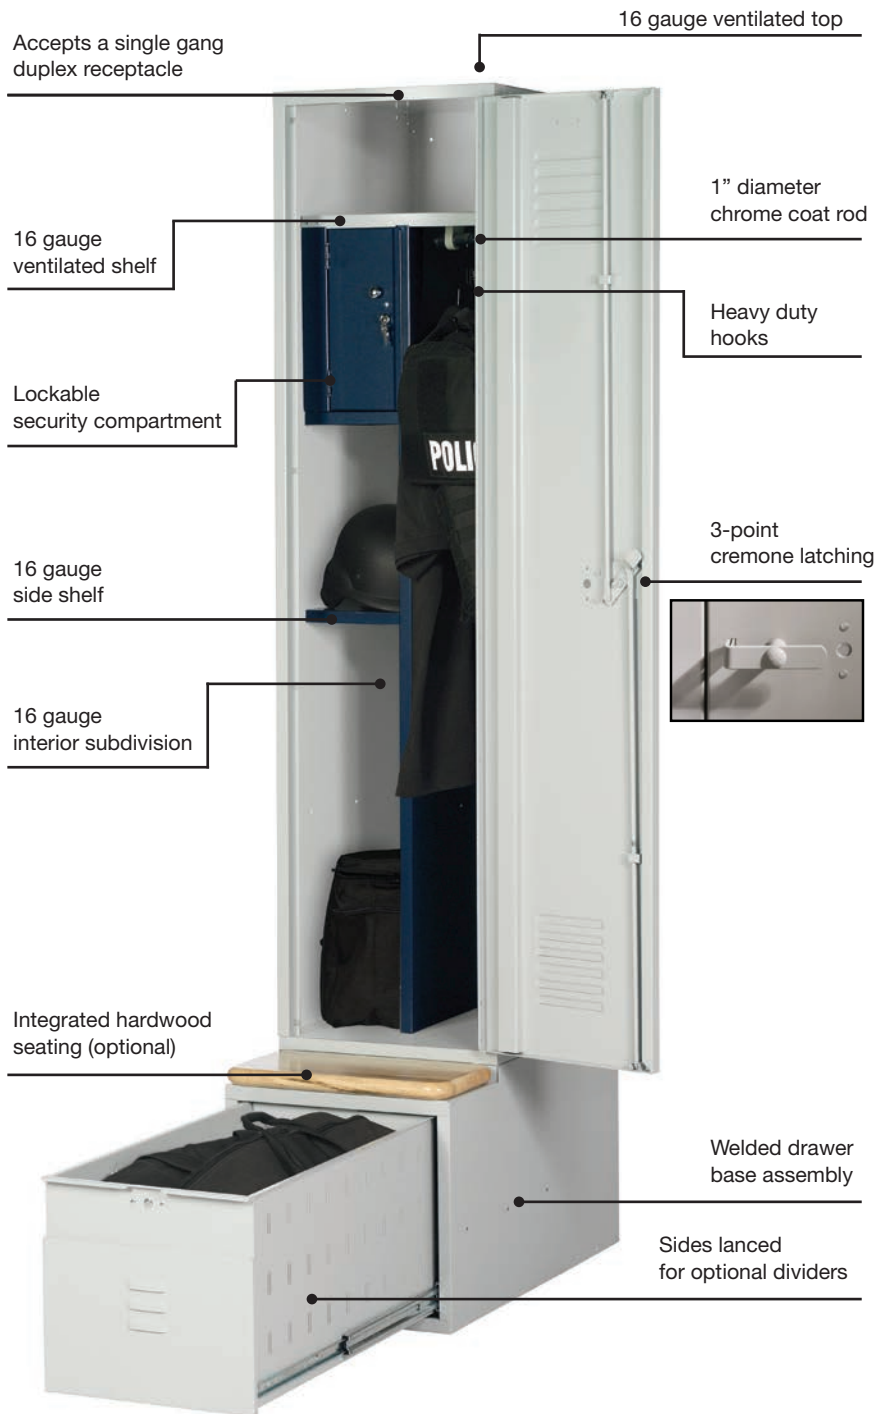

Duty models are available with optional drawer base. Knocked down models ordered without the drawer unit are provided without legs. Welded models without drawer base assembly are available with an optional 4" channel base.



18" Wide/No Base
Welded or KD

24" Wide/No Base
Welded or KD



18" Wide/4" Base
Welded

24" Wide/4" Base
Welded



18" Wide/Drawer
Base Welded or KD

24" Wide/Drawer
Base Welded or KD

Patriot KD

Gear Locker




Patriot Gear Locker

A properly equipped double door Patriot Gear Locker can be the ideal solution for a variety of specialized storage challenges. The ample storage areas at both top and bottom of the 24" wide model shown on this page still leave almost 4 feet between the shelves for hanging uniforms and other gear.

Distinguishing Features:


- All sizes are offered in welded or knocked down construction
- Integrated channel base is standard on welded models
- Factory assembly available on KD models
- Double doors require less clear area in front of the locker to open
- 24 inch deep locker available in 18, 24, 30, 36, 42 or 48 inch widths
- 18 inch deep locker available in 18, 24, 30 or 36 inch widths
- Optional centered divider allows shelves and coat rods to be placed on either side during assembly
- Cremone handle standard on all Gear Lockers

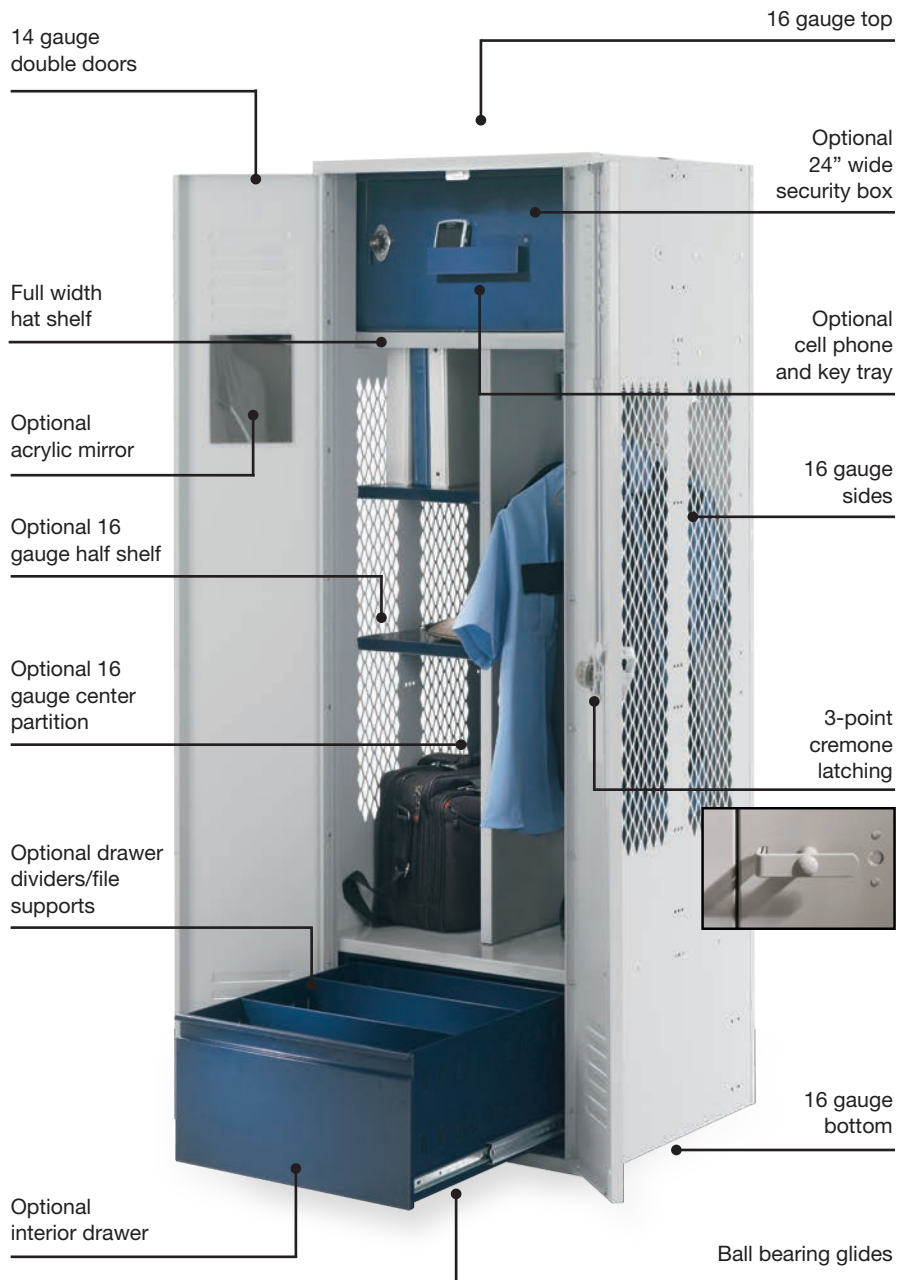


Patriot Welded Gear Locker



Every Patriot Gear interior includes a full-width shelf, 1 inch diameter coat rod and heavy duty hooks. Optional accessories help you incorporate seating, create high density storage or add lockable storage to get the most out of your locker.

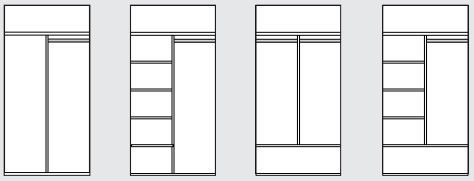

An optional center partition divides the locker space down the middle, allowing for half shelves or coat rods to be installed on either side.

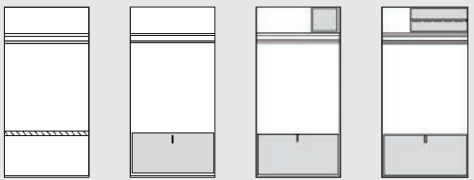

The Patriot interior can be customized using a variety of accessory items that provide more shelf capacity, lockable storage or additional bulk storage.



Patriot KD

Turnout Locker




Patriot Turnout Locker

The key to any turnout locker is the ability to grab and go. The Patriot Turnout Locker puts everything from flight gear to EMS equipment within reach. The open front and perforated sides aid in drying gear while available security boxes, drawers and footlocker provide a secure space for personal items.

Distinguishing Features:

- All sizes are offered in welded or knocked down construction
- Integrated channel base is standard on welded models
- Factory assembly available on KD models
- Open front and hemmed frame
- 24 inch deep locker available in 18, 24, 30, 36, 42 or 48 inch widths
- 18 inch deep locker available in 18, 24, 30 or 36 inch widths
- Number plates mount to the shelf face for easy visibility
- Sides are pre-punched on 12 inch vertical centers to accept additional shelves

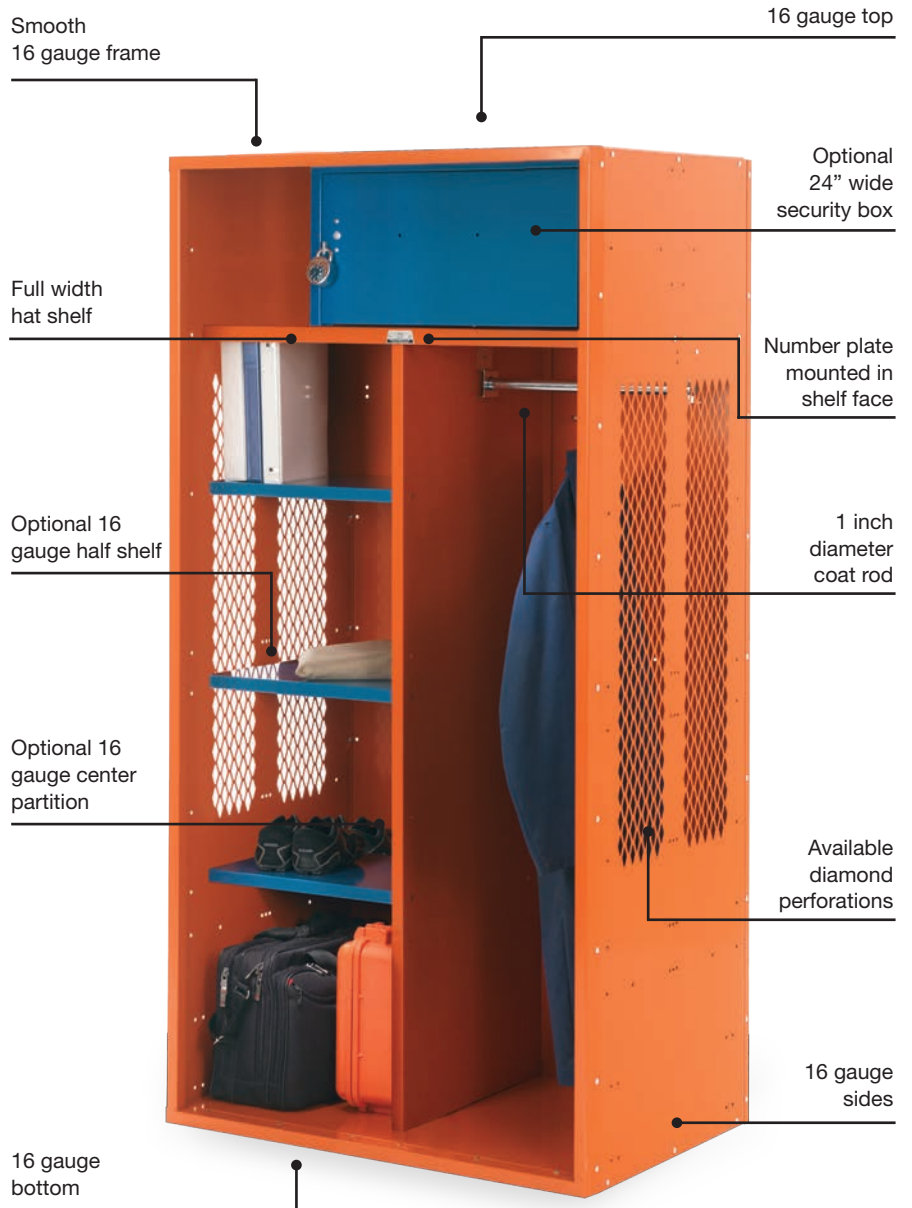

Patriot Welded Turnout Locker



Full width 16 gauge shelf

16 gauge top

1 inch diameter coat rod

Heavy duty coat hooks


Optional footlocker (not shown)

16 gauge sides


Integrated channel base



Turnout lockers give you the advantage of instant access to mission gear, and Patriot accessories like drawers, security boxes or footlockers give you secure storage for items that are best kept under lock and key.

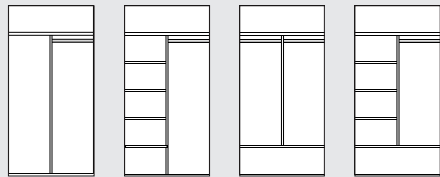

Whether the Patriot you specify has doors or not, the same flexibility is built into each one. Gear and Turnout accessories are designed for use in either type locker.

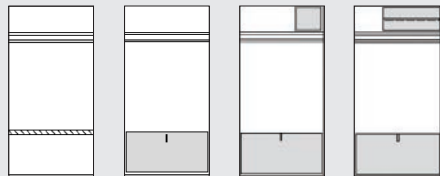


Balance the advantage of an open front locker with secure storage by adding one of the two sizes of security box, heavy duty drawers or a footlocker.



Duty Locker

Configure and Build to Suit


Duty Lockers have preconfigured interiors for storing and organizing a wide range of equipment. The available drawer base not only supports an integrated seating surface but provides several additional cubic feet of storage.

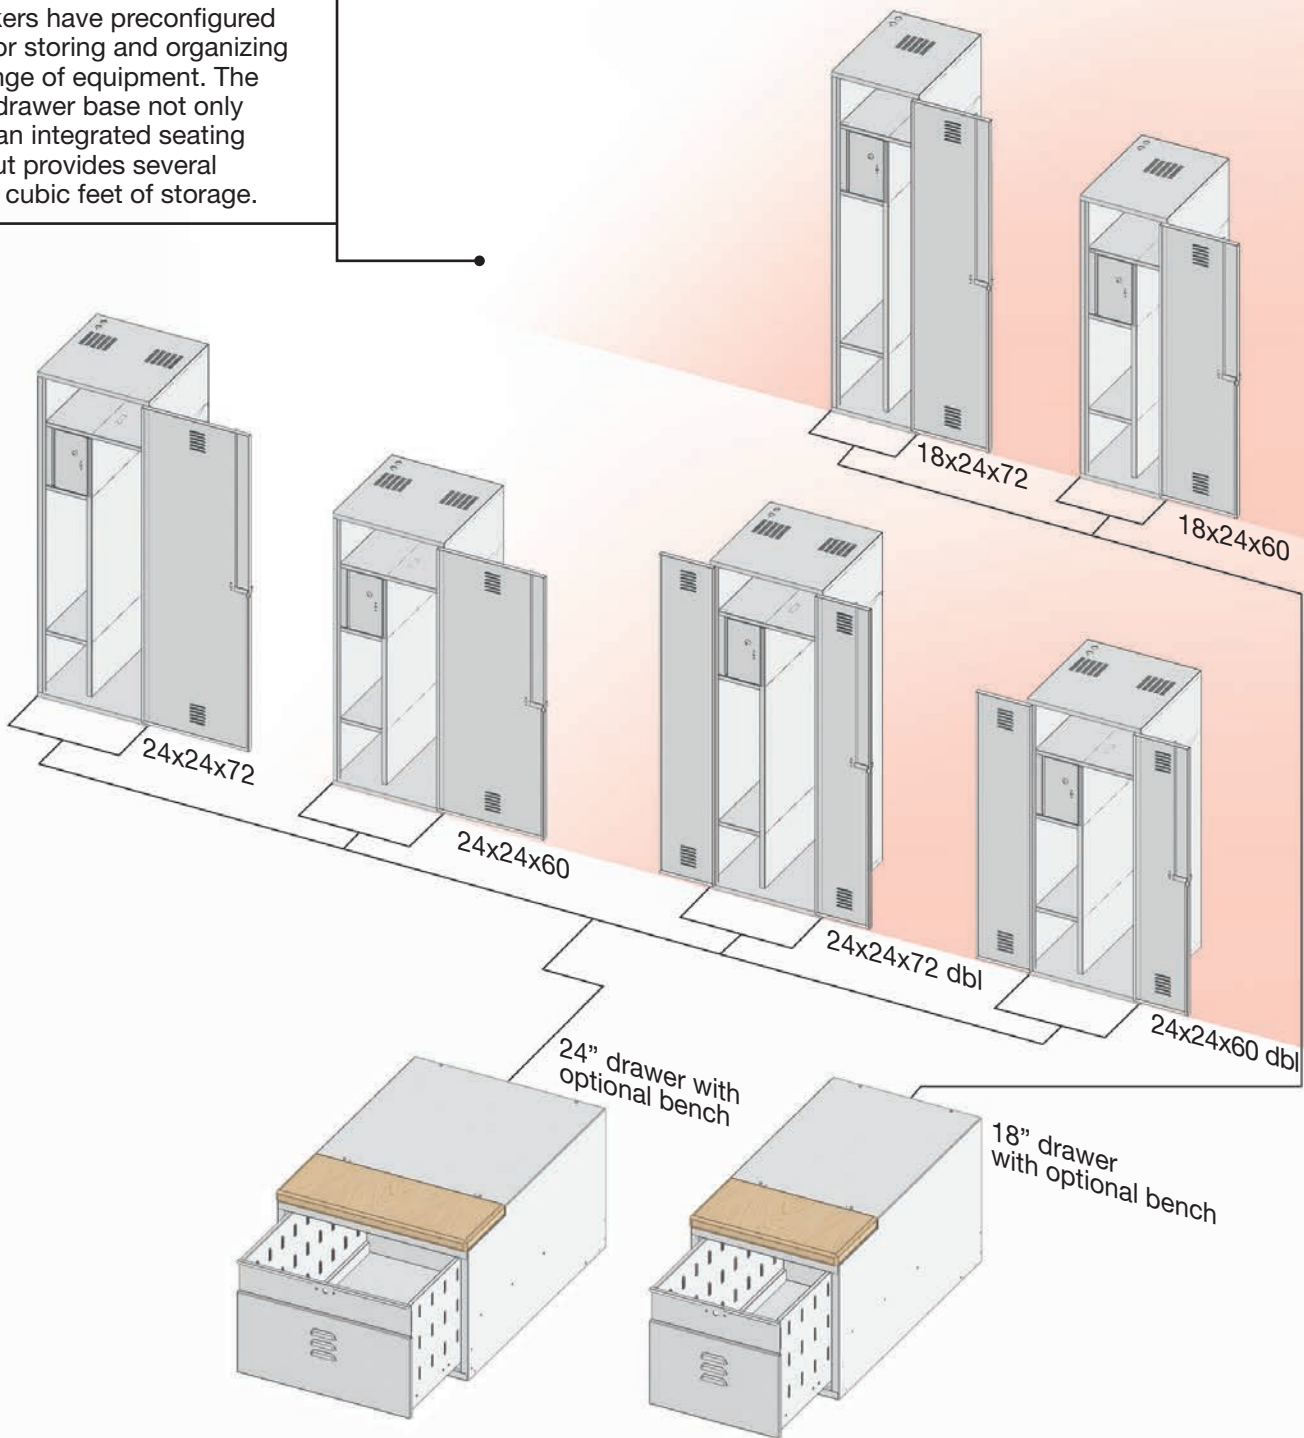

Gear and Turnout Locker

Configure and Build to Suit


One of the key strengths of the Patriot is its flexibility and modular accessories. Each Patriot accessory is designed for use in any of the four Patriot Locker bodies.

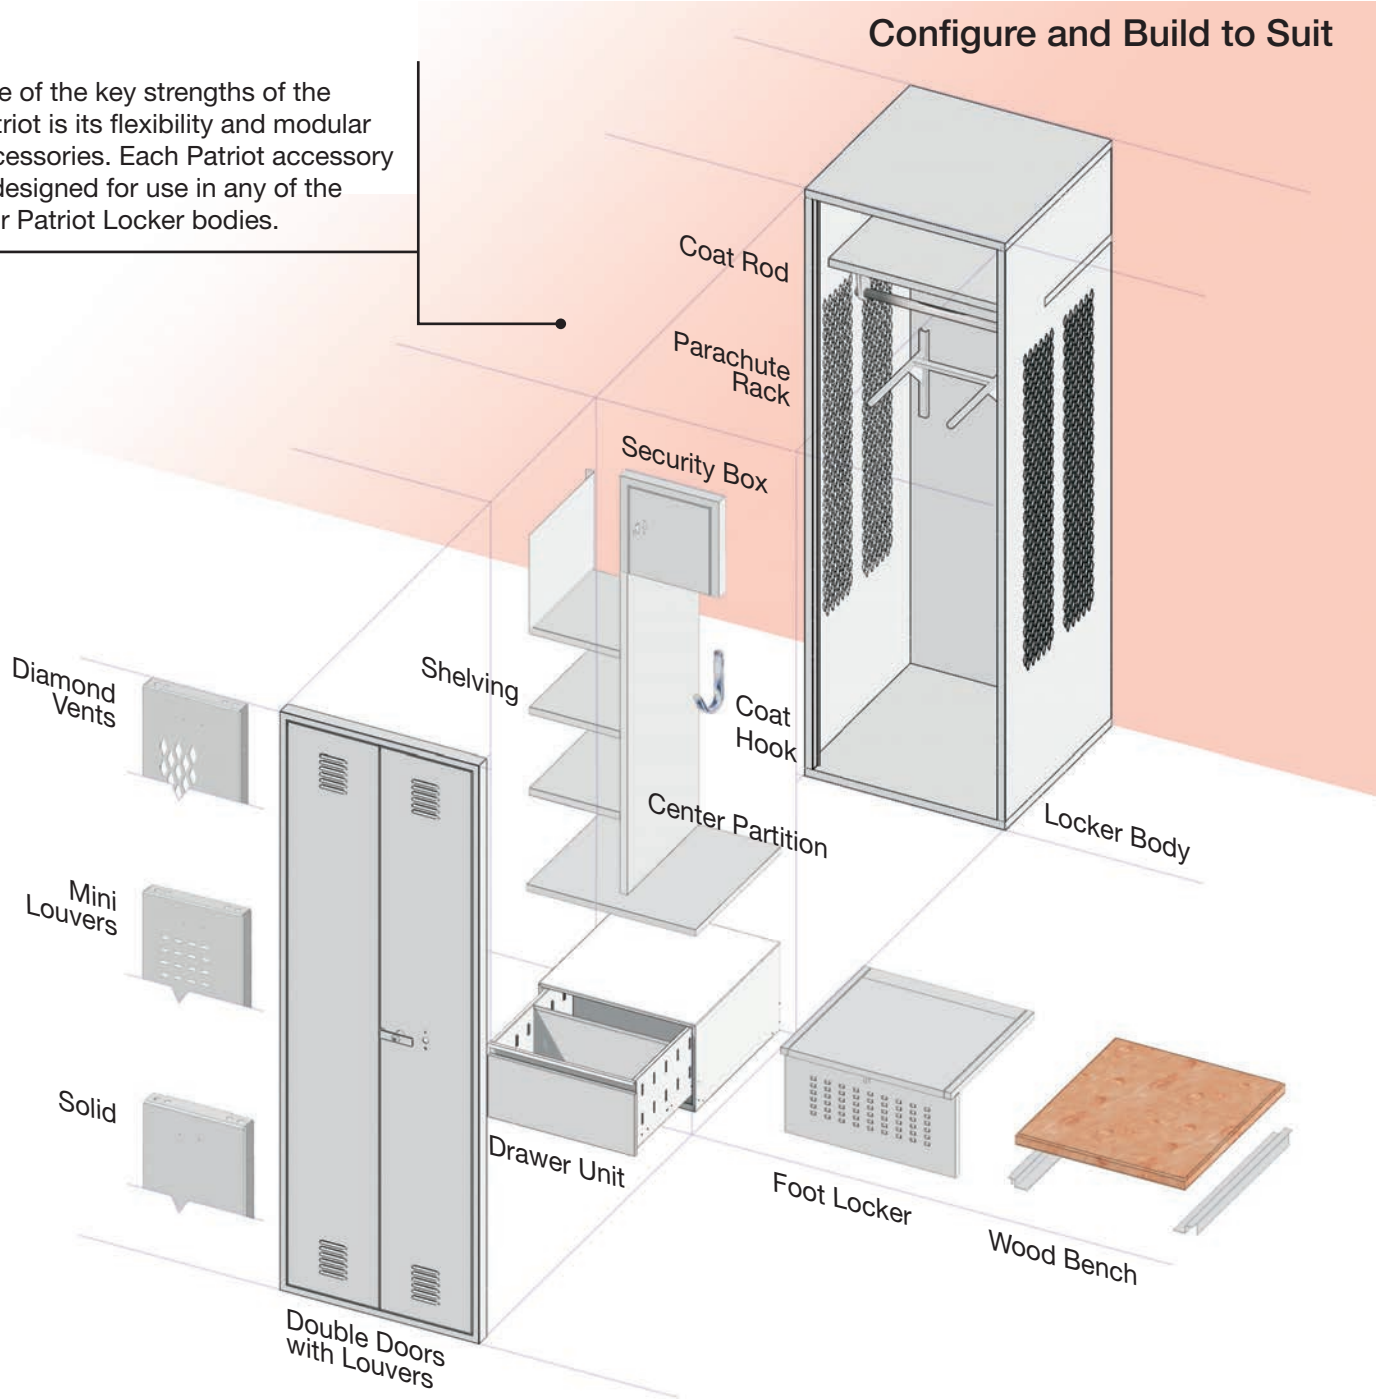

Cell Phone/Key Tray



Heavy Duty 1" Coat Rod with Brackets



Boot Tray

Duty Locker


Options and Accessories

Duty Locker:

The basic Patriot Duty Locker is not very basic at all. Each comes with well appointed interiors configured for service and durability. The accessories listed here help you to personalize and organize them even more.


Cell Phone/Key Tray:

The 8" x 2" x 2" tray is sized for organizing phones, radios or keys and can be mounted to the interior divider.

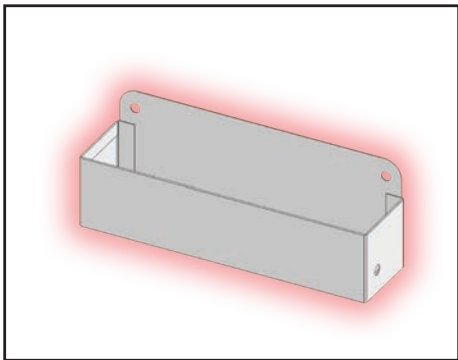


Drawer Divider:

The Duty Locker drawer base has lanced sides to accept vertical dividers spaced to allow the use of your standard hanging files or to separate different gear items.

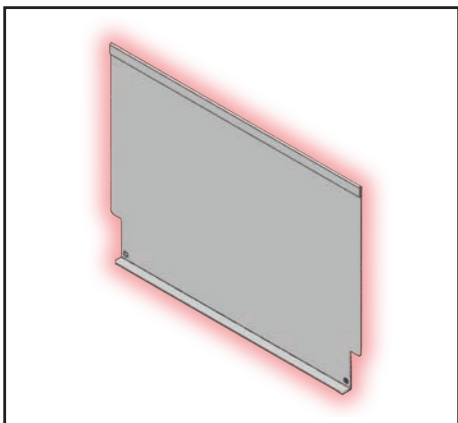


Document Sleeve:

Formed from 16 gauge steel, the document sleeve is available in either a vertical or horizontal configuration for efficient storage of portfolios, note pads or binders.

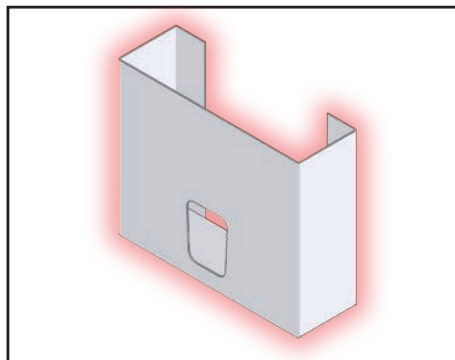

Acrylic Mirror:

The adhesive-backed mirror resists breakage and can be permanently mounted wherever you need it.

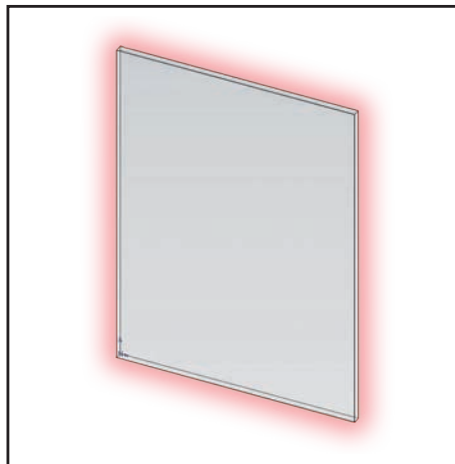


Additional Accessories:

Standard sloping hood can be used to conceal wiring (by other) or to create a plenum connected to a facility's HVAC system (by other). Label holders can be added to better identify the locker and a field-installed stainless strike plate can prevent wear to the door finish caused by hanging locks.


Boot Tray:

The 12" x 14" boot tray provides air space between soiled or wet footwear and the locker bottom. A series of round hole perforations are used to promote airflow and the tray is kept from marring the locker finish by rubber pads. Not for use on 18 inch wide Duty Lockers.

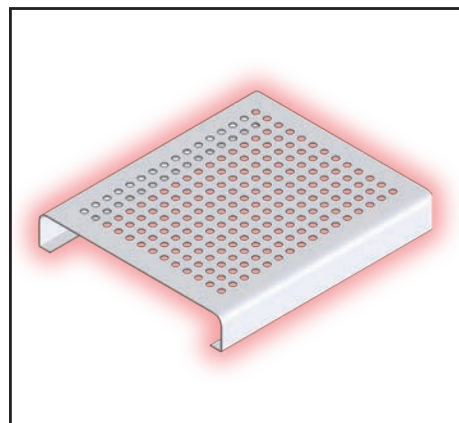

Side Shelf:

Each Duty Locker includes a side shelf that mounts under the security box, but there is room for another one or two depending on the locker height.

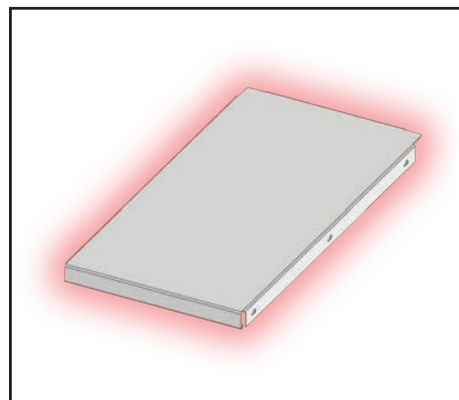

Note: Some accessories designed specifically for Duty Lockers may not be compatible with Gear and Turnout Lockers.

Gear and Turnout Locker


Options and Accessories

Security Box:

Available in either 12 inch or 24 inch wide configurations, the security box uses a 14 gauge lockable door, 16 gauge side panel and welded door frame to properly secure valuable equipment or personal items. The 24 inch model includes a full width shelf to double the usable storage area. Any standard box locker padlock or built in lock can be used to secure the contents.

Cell Phone/Key Tray:

The 8" x 2" x 2" tray is sized for organizing phones, radios or keys and can be attached to the optional center divider or to the door using the accessory mounting panel.

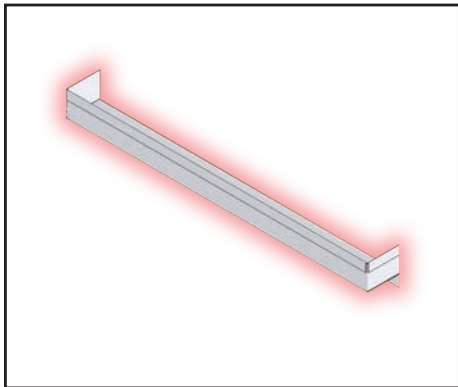

Hardwood Seat:


Used in place of a footlocker or drawers, the 1-1/4" thick solid hardwood bench provides a sturdy seating surface with open storage underneath for stowing equipment.

Footlocker:

The reinforced lid of the foot locker features a continuous hinge and also serves as a seat. The front panel includes a single point latch with padlock strike plate and mini louvers for security and ventilation.


Document Sleeve:

Formed from 16 gauge steel, the document sleeve is available in either a vertical or horizontal configuration for efficient storage of portfolios, note pads or binders.

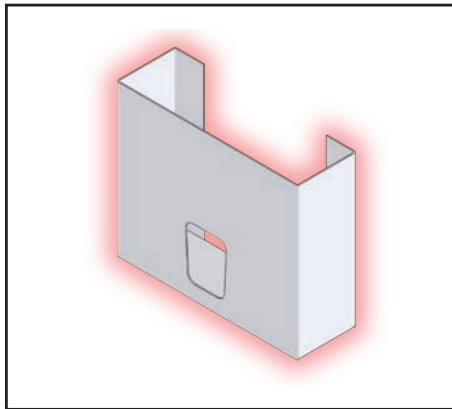

Garment Separator:

The 16 gauge steel channel attaches underneath the top shelf and uses diamond perforations to keep hangers from bunching together for improved ventilation.

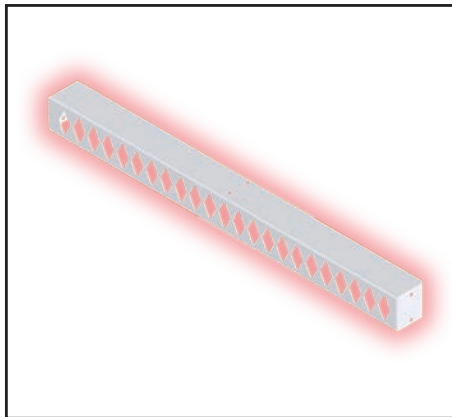

Drawer Unit:


Mounted within the confines of the locker body, the steel drawer features full extension glides for easy access to files or equipment without taking up valuable space when not in use. The ball-bearing glides are rated at 250 lb. capacity for performance and durability.

Parachute Rack:

Formed from 3/4 inch diameter, heavy wall steel tube and reinforced by 14 gauge gussets and supports for hanging heavy flight gear or body armor. Ordering this option replaces the standard heavy duty rear-mounted coat hooks.

Boot Tray:

The 12" x 14" boot tray provides air space between soiled or wet footwear and the shelf or locker bottom. A series of round perforations are used promote air flow and the tray is kept from marring the locker finish by rubber pads.

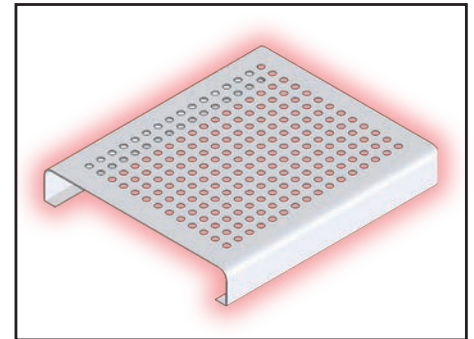

Accessory Mounting Panel:

A 24 inch high panel formed from 16 gauge steel permits mounting several accessories to the door without drilling or using exposed fasteners.

Additional Locker

Accessories:

Standard Penco locker accessories such as vertical fillers, continuous slope hoods, locker room benches and recess trim are available for use on Patriot Lockers. See Penco price book for details.

Duty, Gear and Turnout

Sizes and Dimensions

There is more to the Duty Locker than hand-picked features and a range of popular sizes.

Aside from continuous hinges, turn handles and heavy gauge bodies, they stand apart from their Gear and Turnout counterparts with features standard only on Duty models.

We've perforated the hat shelf over the garment side of the locker so you get air flow where it's needed without sacrificing storage. The 18 inch deep locker features a 15 inch deep shelf. The 24 inch deep locker has a 21 inch deep shelf.

The tops of all Duty Lockers are punched with special 1/8 x 1 inch slots to provide ventilation without compromising security.

If you need power for charging radios, phones and laptops, your local electrician can remove the factory knockouts, mount receptacles and tie them into your building's electrical service.

The use of standard locker benches to span multiple drawer bases is recommended to provide smooth and continuous seating. Your installer can field cut as necessary, or we can provide custom lengths with field joints, mitered corners, and right or left hand ends based upon your layout drawing.

Patriot® Duty Lockers

KD (Knocked Down) Construction				Welded Construction			
Duty Lockers (WITH 18" Drawer Base)				Duty Lockers (WITH 18" Drawer Base)			
W	D	H	Cat. No.	W	D	H	Cat. No.
18	24	60/78	64KD182478	18	24	60/78	64WD182478C
24	24	60/78	64KD242478	24	24	60/78	64WD242478C
18	24	72/90	64KD182490	18	24	72/90	64WD182490C
24	24	72/90	64KD242490	24	24	72/90	64WD242490C
Duty Lockers (NO Base and NO Legs)				Duty Lockers (NO Base and NO Legs)			
W	D	H	Cat. No.	W	D	H	Cat. No.
18	24	60	64KN182460	18	24	60	64WN182460C
24	24	60	64KN242460	24	24	60	64WN242460C
18	24	72	64KN182472	18	24	72	64WN182472C
24	24	72	64KN242472	24	24	72	64WN242472C
Quick Facts				Duty Lockers (4" integral Channel Base)			
18" wide Duty Lockers have single doors				W D H Cat. No. 18 24 64 64WCB182464C 24 24 64 64WCB242464C 18 24 76 64WCB182476C 24 24 76 64WCB242476C			
24" wide Duty Lockers have double doors							
Drawer bases are welded and bolt to the lockers							
All part numbers represent 1-wide units Cremone handles are standard on all models							

Patriot® Gear and Turnout Lockers – 18" and 24" Deep

KD (Knocked Down) Construction					All-Welded Construction				
Gear Lockers (WITH Doors)					Gear Lockers (WITH Doors)				
W	D	H	Shelf Depth	Cat. No.	W	D	H	Shelf Depth	Cat. No.
18 (SD)	18	72	15	6KGDA84	18 (SD)	18	76	15	6WGDA84C
24 (SD)	18	72	15	6KGDA94	24 (SD)	18	76	15	6WGDA94C
24	18	72	15	6KGDA04	24	18	76	15	6WGDA04C
30	18	72	15	6KGDA14	30	18	76	15	6WGDA14C
36	18	72	15	6KGDA24	36	18	76	15	6WGDA24C
24	24	72	15	6KGDA00	24	24	76	15	6WGDA00C
30	24	72	15	6KGDA10	30	24	76	15	6WGDA10C
36	24	72	15	6KGDA20	36	24	76	15	6WGDA20C
42	24	72	15	6KGDA30	42	24	76	15	6WGDA30C
48	24	72	15	6KGDA40	48	24	76	15	6WGDA40C
18 (SD)	24	72	21	6KGDA82	18 (SD)	24	76	21	6WGDA82C
24 (SD)	24	72	21	6KGDA92	24 (SD)	24	76	21	6WGDA92C
24	24	72	21	6KGDA02	24	24	76	21	6WGDA02C
30	24	72	21	6KGDA12	30	24	76	21	6WGDA12C
36	24	72	21	6KGDA22	36	24	76	21	6WGDA22C
42	24	72	21	6KGDA32	42	24	76	21	6WGDA32C
48	24	72	21	6KGDA42	48	24	76	21	6WGDA42C
Turnout Lockers (NO Doors)					Turnout Lockers (NO Doors)				
W	D	H	Shelf Depth	Cat. No.	W	D	H	Shelf Depth	Cat. No.
18	18	72	15	6KTDA84	18	18	76	15	6WTDA84C
24	18	72	15	6KTDA04	24	18	76	15	6WTDA04C
30	18	72	15	6KTDA14	30	18	76	15	6WTDA14C
36	18	72	15	6KTDA24	36	18	76	15	6WTDA24C
24	24	72	15	6KTDA00	24	24	76	15	6WTDA00C
30	24	72	15	6KTDA10	30	24	76	15	6WTDA10C
36	24	72	15	6KTDA20	36	24	76	15	6WTDA20C
42	24	72	15	6KTDA30	42	24	76	15	6WTDA30C
48	24	72	15	6KTDA40	48	24	76	15	6WTDA40C
18	24	72	21	6KTDA82	18	24	76	21	6WTDA82C
24	24	72	21	6KTDA02	24	24	76	21	6WTDA02C
30	24	72	21	6KTDA12	30	24	76	21	6WTDA12C
36	24	72	21	6KTDA22	36	24	76	21	6WTDA22C
42	24	72	21	6KTDA32	42	24	76	21	6WTDA32C
48	24	72	21	6KTDA42	48	24	76	21	6WTDA42C

Duty, Gear and Turnout Locker Accessories

Letter Codes below indicate where accessory is used: D=Duty, G=Gear, T=Turnout

Description		W	D	H	Cat. No.	
Center Partitions (G, T)	Hat Shelf to Locker Bottom	-	15	58	6CPX269C	
	Hat Shelf to Optional Bottom Shelf at 12 in.	-	15	45	6CPX270C	
	Hat Shelf to Locker Bottom	-	21	58	6CPX300C	
	Hat Shelf to Optional Bottom Shelf at 12 in.	-	21	45	6CPX301C	
Full Width Bottom Shelf (G, T) (Required with drawers)		18	18	-	6SHX695C	
		24	18	-	6SHX575C	
		30	18	-	6SHX576C	
		36	18	-	6SHX577C	
		18	24	-	6SHX696C	
		24	24	-	6SHX530C	
		30	24	-	6SHX531C	
		36	24	-	6SHX532C	
Full Width Intermediate Shelf (G, T) (Punched for center partition. Face is NOT punched for number plate.)		42	24	-	6SHX533C	
		48	24	-	6SHX534C	
		18	15	-	6SHX700C	
		24	15	-	6SHX708C	
		30	15	-	6SHX709C	
		36	15	-	6SHX710C	
		42	15	-	6SHX803C	
		48	15	-	6SHX804C	
		18	21	-	6SHX699C	
		24	21	-	6SHX703C	
		30	21	-	6SHX704C	
		36	21	-	6SHX705C	
Half Shelves for use with Center Divider (G, T) (Match half shelf and divider to hat shelf depth)		42	21	-	6SHX706C	
		48	21	-	6SHX707C	
		9	15	-	6SHX697C	
		12	15	-	6SHX521C	
		15	15	-	6SHX522C	
		18	15	-	6SHX523C	
		21	15	-	6SHX524C	
		24	15	-	6SHX525C	
		9	21	-	6SHX698C	
		12	21	-	6SHX561C	
		15	21	-	6SHX562C	
		18	21	-	6SHX563C	
Footlocker (G, T) (Not for use with Center Dividers)		21	21	-	6SHX564C	
		24	21	-	6SHX565C	
		18	18	12	6ACXHK58H	
		24	18	12	6ACXHK90H	
		30	18	12	6ACXHK91H	
		36	18	12	6ACXHK92H	
		18	24	12	6ACXHK59H	
		24	24	12	6ACXAB93H	
Security Box (G, T) (Select by hat shelf depth)		30	24	12	6ACXAB94H	
		36	24	12	6ACXAB95H	
		42	24	12	6ACXAB96H	
		48	24	12	6ACXAB97H	
		12	15	12	6ACXAB98H	
		24	15	12	6ACXAB99H	
Drawer Unit - Requires Bottom Shelf (G, T)		12	21	12	6ACXHM53H	
		24	21	12	6ACXHM54H	
	Drawer Unit for 18" Wide Used when ordering an 18" wide Patriot Locker and one 18" drawer unit is required.		18	18	12	6ACXHN70C
			18	24	12	6ACXHN10C
			18	18	15	6ACXHN80C*
			18	24	15	6ACXHN20C*
	18" Drawers for 36" & 42" Wide Used when ordering a 36" wide Patriot Locker & either one 18" drawer or two 18" drawer units are required.		18	18	12	6ACXFF82C
			18	24	12	6ACXFF60C
			18	18	15	6ACXFF87C*
			18	24	15	6ACXFF20C*
	Drawer Unit for 24", 30", 42" & 48" Wide 48" wide drawer units consist of two 24" wide drawers. A 24" wide drawer can be combined with an 18" wide drawer (above) in a 42" wide Patriot Locker. If a 45" high center partition & metal bottom shelf are used, select the 12" high drawer.		24	18	12	6ACXFF83C
			30	18	12	6ACXFF84C
		24	18	15	6ACXFF88C*	
		30	18	15	6ACXFF89C*	
		24	24	12	6ACXFF61C	
		30	24	12	6ACXFF62C	
		24	24	15	6ACXFF21C*	
		30	24	15	6ACXFF22C*	

* 15" high drawer units are not for use with center divider

Description		W	D	H	Cat. No.
Drawer Divider (G, T) (Two required for hanging file folders)		18	-	12	6ACXAB80C
		24	-	12	6ACXAB81C
		30	-	12	6ACXAB82C
		18	-	15	6ACXAB83C
		24	-	15	6ACXAB84C
Document Sleeves (G, T, D)		30	-	15	6ACXAB85C
		12	3	8	6ACXFF54C
		10	3	8	6ACXAB32C
Parachute / Body Armor Rack (G, T)		-	18	-	6ACXAB33C
Adhesive Acrylic Mirror (G, T, D)		6	-	8	96370
Cell Phone/Key Tray (G, T, D)		8	2	2	60830H
Heavy Duty Coat Hook (G, T, D)		-	2	3	6ACXAB37H
Coat Rods (G, T) 1" Diameter, shelf mount only (with light gray brackets)		9	-	-	6ACXHM50H
		12	-	-	6ACXAB38H
		15	-	-	6ACXAB39H
		18	-	-	6ACXAB40H
		21	-	-	6ACXAB41H
		24	-	-	6ACXAB42H
		30	-	-	6ACXAB43H
		36	-	-	6ACXAB44H
		42	-	-	6ACXAB45H
		48	-	-	6ACXAB46H
Garment Separators (G, T)		12	-	5	6ACXFF00H
		15	-	5	6ACXFF01H
		18	-	5	6ACXFF02H
		21	-	5	6ACXFF03H
		24	-	5	6ACXFF04H
		30	-	5	6ACXFF05H
		36	-	5	6ACXFF06H
		42	-	5	6ACXFF07H
Boot Tray ** (G, T, D)		48	-	5	6ACXFF08H
	14	12	-	6ACXFF09H	
Accessory Mounting Plate (G, D) (To mount accessories to left side door)		12	-	24	6ACXFF10H
		15	-	24	6ACXFF11H
		18	-	24	6ACXFF12H
		21	-	24	6ACXFF13H
Hardwood Bench Seat (G, T) (Not for use with center divider)		24	-	24	6ACXFF14H
		18	18	-	6RQ1317BH
		24	18	-	6RQ1305BH
		30	18	-	6RQ1306BH
		36	18	-	6RQ1307BH
		18	24	-	6RQ1318BH
		24	24	-	6RQ1232BH
		30	24	-	6RQ1233BH
Metal Seat (G, T) (Not for use with center divider)		36	24	-	6RQ1234BH
		42	24	-	6RQ1235BH
		48	24	-	6RQ1236BH
		18	18	-	6ACXHM51H
		24	18	-	6ACXHK97AH
		30	18	-	6ACXHK98AH
		36	18	-	6ACXHK99AH
		18	24	-	6ACXHM52H
Name Card Holder (G, D)		24	24	-	6ACXFF49AH
		30	24	-	6ACXFF50AH
		36	24	-	6ACXFF51AH
		42	24	-	6ACXFF52AH
		48	24	-	6ACXFF53AH
		-	-	-	9446H

** When a boot tray is used in a DUTY locker, it must be a 24 inch wide locker ONLY.



Patriot Locker

Lock and Load

All Patriot Lockers can be outfitted with a number of locking options. While all models are designed to use readily available locker locks, some options requires specific lock types.


A – The Duty Locker security compartment door is hinged on the left and accepts most built-in spring bolt or dead bolt locks designed for a left-hinged locker door. It does not have a padlock attachment.

B – The standard cremone handle door on Duty and Gear Lockers can accept a padlock or built-in lock with a retractable dead bolt or spring bolt. Optional handles offered on single door models like the Classic III and Defiant II also accept padlocks, as well as a variety of built-in key and combination locks.

C – All Patriot drawers are configured to work best with a built-in spring bolt key or battery powered lock for ease of use.

D – Gear and Turnout security boxes are hinged on the right and can be equipped with any box locker lock including padlocks.

E – Gear and Turnout footlockers have a padlock attachment and no provision for built-in locks.

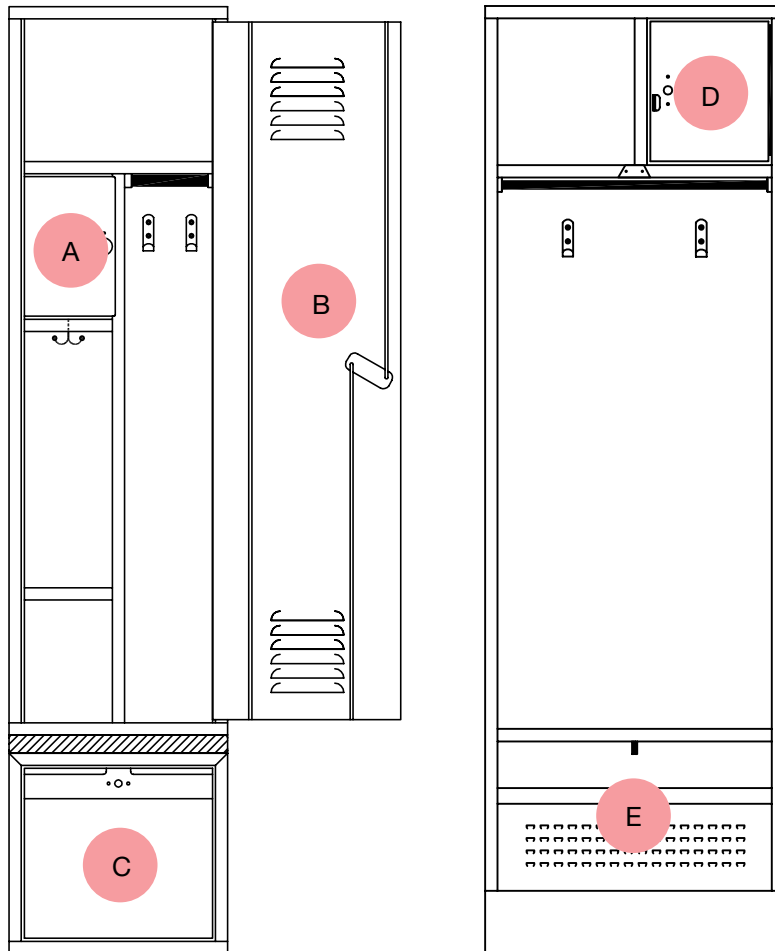

	Padlock	Keyed Spring Bolt	Keyed Dead Bolt	Combination Spring Bolt	Combination Dead Bolt	Zephyr RFID Lock
A	NO	PREFERRED	OK	OK (LH)	OK (LH)	OK (LH)
B	OK	REFER TO LOCK APPLICATION TABLE IN LOCKER PRICE BOOK				OK
C	NO	PREFERRED	OK	NO	NO	OK
D	OK	PREFERRED	OK	OK	OK	OK
E	ONLY	NO	NO	NO	NO	NO

Color Chart

24 Designer Colors



NOTE: Colors shown are as close to actual finishes as the printing process allows. Do not make your final color selection based on the color shade shown on this page. Penco Color Charts are available for a more accurate color match. Exposure to high humidity, chlorine salts, abrasive cleaners, germicidal cleaners and acids can damage the finish and will void the guarantee. For outdoor applications or other harsh environmental conditions, contact your Penco representative.

Standard Colors

To assure rust resistance and paint adhesion, all Penco steel products receive a state of the art pre-paint conditioning that includes a thorough cleansing by a hot spray washing process, then a specially formulated coating is applied creating a surface that resists corrosion and improves paint adhesion. All lockers are available in the 24 colors shown above.

All Penco locker doors, frames and body parts are painted the same color, as standard.

Two-tone color combinations are also available. Contact your Penco sales representative for complete information.



Standard Powder Coat Finish


Penco's standard 1 mil thick paint finish is perfect for most applications. The paint surface is tough and durable and offers a beautiful drip-free surface, excellent edge coverage and environmentally friendly application.

PowderCoatPlus™

PowderCoatPlus is an optional cost-effective way of improving the durability and rust resistance. After a specialized cleaning and pre-treatment of the steel, a 2 mil thick coating of powder coat enamel is applied and baked onto the steel surface.

X-Off™ Anti-Graffiti Paint

Penco's optional X-Off Anti-Graffiti Paint for lockers provides a surface coating that allows easy removal of graffiti with alcohol and water. This specially formulated paint has a tight molecular structure that completely seals the locker surface, preventing graffiti and corrosive agents from penetrating the finish.



Supplies needed:
99% isopropyl alcohol, water, cleaning cloths, eye and hand protection.



Specifications

Duty Locker Knocked Down Build

Heavy Duty Lockers: All locker body components made of cold rolled steel specially formed for added strength and rigidity and to ensure tight joints at fastening points.

Locker Body: Sides, Bottoms, Tops, and Shelves: 16 gauge steel. Sides punched for shelf locations on nominal 12 inch centers.

Backs: One piece, solid 18 gauge steel.

Face Frames: 16 gauge, formed in a channel shape with continuous vertical door strike.

Doors: One piece 14 gauge sheet steel. Standard Ventilation: 6 inch (152.4 mm) wide by 3/4 inch (19 mm) high horizontal louvers arranged in two groups of six.

Optional Ventilation: 3/4 inch (19 mm) wide by 1-1/2 inch (38 mm) high diamond-shaped perforations or 3/4 inch (19 mm) wide by 1/4 inch (6.4 mm) high security mini louvers. Solid doors.

Hinges: Continuous type: 16 gauge piano hinge measuring full height of door. Welded to door and attached to locker frame using steel rivets.

Sides: 16 gauge sheet steel, solid.

Tops and Bottoms: Three sides formed 90 degrees, the front offset formed to be flush with horizontal frame member. Tops accept a single gang duplex receptacle and are ventilated with a pattern of 1x1/8" slots.

Shelves: Flanged four sides with additional return flange on front edge to increase strength.

Assembly Hardware: Zinc plated truss fin head bolts and hex nuts. Hole spacing in locker body construction: Not exceeding 9 inches (225 mm). Optional factory assembly of locker bodies using rivets.

Drawer Base: Fully-welded 14 gauge case with 16 gauge welded drawer insert with sides lanced to accept vertical dividers and supported by ball bearing glides. Adds 18 inches to locker height when so equipped. Drawer is 33 inches deep.

DOOR HANDLES AND LATCHING

Cremone Latching: Handle shall be a heavy duty turn handle that secures the door at three points. The top and

bottom frames are engaged with 3/8 inch (9.5 mm) steel rods, and a 1/8 inch (3 mm) thick center latch engages at the side.

Double door configurations shall consist of a left hinged door secured its full length by the right hinged door when latched.

Handle Assembly shall be secured to door using a threaded lock nut to facilitate adjustment and removal for repair if necessary. Welded handle assemblies shall not be accepted.

Single Point Latch: Single door models only. Recessed handle with integrated pull and 11 gauge steel hasp welded to locker frame.

Multiple Point Latch: Single door models only. Recess finger-lift control handle in door, positive automatic type latching, whereby locker may be locked when open, then closed without unlocking.

INTERIOR EQUIPMENT

Shelf: 16 gauge full width, located approximately 12 inches (304.8 mm) below top of locker and perforated to promote movement of air.

Hooks and Coat Rod: Two heavy duty 3" high, 7/8" wide 2-1/2 inch deep single-prong wall hooks and one heavy duty chrome plated 1 inch diameter coat rod.

Interior Divider: 16 gauge, with lockable compartment and additional side shelf.

FABRICATION

Fabricate lockers square, rigid, without warp, with metal faces flat and free of distortion.

Finish: Finish coat shall be electrostatically applied powder coat enamel properly cured to paint manufacturer specifications to achieve optimum performance. All lockers shall be painted inside and outside with the same color.

Powder Coat: Dry thickness of 1 to 1.2 mils (0.025 to 0.03 mm).

Color: As selected from manufacturer's standard colors.



Specifications

Duty Locker Welded Build



Heavy Duty Lockers: All locker body components made of cold rolled steel specially formed for added strength and rigidity and to ensure tight joints at fastening points.

Locker Body: Sides, Bottoms, Tops, and Shelves: 16 gauge steel. Sides punched for shelf locations on nominal 12 inch centers

Backs: One piece, solid 18 gauge steel.

Face Frames: 16 gauge, formed in a channel shape with continuous vertical door strikes and integral with locker side.

Doors: One piece 14 gauge sheet steel. Standard Ventilation: 6 inch (152.4 mm) wide by 3/4 inch (19 mm) high horizontal louvers arranged in two groups of six.

Optional Ventilation: 3/4 inch (19 mm) wide by 1-1/2 inch (38 mm) high diamond-shaped perforations or 3/4 inch (19 mm) wide by 1/4 inch (6.4 mm) high security mini louvers. Solid doors.

Hinges: Continuous type: 16 gauge piano hinge measuring full height of door. Welded to door and attached to locker frame using steel rivets.

Sides: 16 gauge sheet steel, solid.

Tops: Notched and formed sheet; one continuous flat top for each locker. Tops accept a single gang duplex receptacle and are ventilated with a pattern of 1x1/8" slots.

Channel Base: Notched and formed sheet; one continuous bottom for each locker, suitable for anchoring to wood or concrete bases. Adds 4 inches to locker height when so equipped.

Shelves: Flanged four sides with additional return flange on front edge to increase strength.

Drawer base: Fully welded 14 gauge case with 16 gauge welded drawer insert with sides lanced to accept vertical dividers and supported by ball bearing glides. Adds 18 inches to locker height when so equipped. Drawer is 33 inches deep.

DOOR HANDLES AND LATCHING

Cremona Latching: Handle shall be a heavy duty turn handle that secures the door at three points. The top and bottom frames are engaged with 3/8 inch (9.5 mm) steel rods, and a 1/8 inch (3 mm) thick center latch engages at the side.

Double door configurations shall consist of a left hinged door secured its full length by the right hinged door when latched.

Handle Assembly shall be secured to door using a threaded lock nut to facilitate adjustment and removal for repair if necessary. Welded handle assemblies shall not be accepted.

Single Point Latch: Single door models only. Recessed handle with integral pull and 11 gauge steel hasp welded to locker frame.

Multiple Point Latch: Single door models only. Recess finger-lift control handle in door, positive automatic type latching, whereby locker may be locked when open, then closed without unlocking.

INTERIOR EQUIPMENT

Shelf: 16 gauge full width, located approximately 12 inches (304.8 mm) below top of locker and perforated to promote movement of air.

Hooks and coat rod: Two heavy duty 3" high, 7/8" wide 2-1/2 inch deep single-prong wall hooks and one heavy duty chrome plated 1 inch diameter coat rod.

Interior Divider: 16 gauge, with lockable compartment and additional side shelf.

FABRICATION

Fabricate lockers square, rigid, without warp, with metal faces flat and free of distortion.

Finish: Finish coat shall be electrostatically applied powder coat enamel properly cured to paint manufacturer specifications to achieve optimum performance. All lockers shall be painted inside and outside with the same color.

Powder Coat: Dry Thickness of 1 to 1.2 mils (0.025 to 0.03 mm).

Color: As selected from manufacturer's standard colors.

Specifications

Gear and Turnout Knocked Down Build

Heavy Duty Lockers: All locker body components made of cold rolled steel specially formed for added strength and rigidity and to ensure tight joints at fastening points.

Locker Body: Sides, Bottoms, Tops, and Shelves: 16 gauge steel.

Sides punched for shelf locations on nominal 12 inch centers.

Backs: Solid 18 gauge steel.

Sides: 16 gauge sheet steel with 3/4 inch (19mm) wide by 1-1/2 inch (38mm) high diamond-shaped perforations.

Optional: solid sides without ventilation.

Tops and Bottoms: Three sides formed 90 degrees, the front offset formed to be flush with horizontal frame member.

Shelves: Flanged on four sides formed to 90 degrees, front edge having a second bend.

Frame: Vertical frame member to be not less than 16 gauge formed to a channel shape and hemmed to create a smooth interior edge. Intermembering parts to be mortised and tenoned and electrically welded together in a rigid assembly capable of resisting strains. Hole spacing in locker body construction: Not exceeding 9 inches (225 mm).

Assembly Hardware: Zinc plated truss fin head bolts and hex nuts.

Optional factory assembly of locker bodies using rivets.

Interior Equipment

Shelf: 16 gauge full width located approximately 12 inches (304.8 mm) below top of locker.

Hooks and Coat Rod: Two heavy duty 3 inch high, 7/8 inch wide 2-1/2 inch deep single-prong wall hooks and one chrome plated 1 inch diameter coat rod.

Fabrication

Fabricate lockers square, rigid, without warp, with metal faces flat and free of distortion.

Knocked Down Lockers: Fabricate lockers on the unit principle, each locker with individual face frame, individual top, bottom, back, and shelves, with two sides forming one complete unit. Verify dimensions and arrangement before fabrication.

Finish: Finish coat shall be electrostatically applied powder

coat enamel properly cured to paint manufacturer specifications to achieve optimum performance. All lockers shall be painted inside and outside with the same color.

Powder Coat: Dry thickness: 1 to 1.2 mils (0.025 to 0.03 mm).

Color: As selected from manufacturer's standard colors.

Gear Lockers – Same as above with the following substitutions and additions:

Doors: One piece 14 gauge sheet steel. Standard ventilation: 6 inch (152.4 mm) wide by 3/4 inch (19 mm) high horizontal louvers arranged two groups of six.

Optional ventilation: 3/4 inch (19 mm) wide by 1-1/2 inch (38 mm) high diamond-shaped perforations or 3/4 inch (19 mm) by 1/4 inch (6.4 mm) high security mini louvers. Solid doors.

Door Frames: 16 gauge formed in a channel shape with continuous vertical door strikes.

Hinges: Continuous type: 16 gauge piano hinge measuring full height of door. Welded to door and attached to locker frame using steel rivets.

Door Handles and Latching

Cremone Latching: Handle shall be a heavy duty turn handle that secures the door at three points. The top and bottom frames are engaged with 3/8 inch (9.5 mm) steel rods, and a 1/8 inch (3 mm) thick center latch engages at the side. Double door configurations shall consist of a left-hinged door secured its full length by the right hinged door when latched.

Handle assembly shall be secured to door using a threaded lock nut to facilitate adjustment and removal for repair if necessary. Welded handle assemblies shall not be accepted.

Single Point Latch: 24" wide single door only. Recessed handle with integral pull and 11 gauge steel hasp welded to locker frame.

Multiple Point Latch: 24" wide single door only. Recess finger-lift control handle in door, positive automatic type latching, whereby locker may be locked when open, then closed without unlocking.



Specifications

Gear and Turnout Welded Build



Heavy Duty Lockers: All locker body components made of cold rolled steel specially formed for added strength and rigidity and to ensure tight joints at fastening points.

Locker Body: Sides, Bottoms, Tops, and Shelves: 16 gauge steel.

Sides punched for shelf locations on nominal 12 inch centers.

Backs: Solid 18 gauge steel.

Groups to 48 inches (1.219 m) wide: One piece back.

Groups over 48 inches (1.219 m) wide: Two piece back.

Frame: 16 gauge formed in a channel shape with hemmed edge.

Sides: 16 gauge sheet steel with 3/4 inch (19mm) wide by 1-1/2 inch (38mm) high diamond-shaped perforations.

Optional: solid sides without ventilation.

Tops: Notched and formed sheet; one continuous flat top for each group of lockers.

Channel Base: Notched and formed sheet; one continuous bottom for each group of lockers, suitable for anchoring to wood or concrete bases. Adds 4 inches to the overall height of locker.

Shelves: Flanged four sides with additional return flange on front edge to increase strength.

Interior Equipment

Shelf: 16 gauge full width, located approximately 12 inches (304.8 mm) below top of locker.

Hooks and Coat Rod: Two heavy duty 3" high, 7/8" wide 2-1/2 inch deep single-prong wall hooks and one heavy duty chrome plated 1 inch diameter coat rod.

Fabrication

Fabricate lockers square, rigid, without warp, with metal faces flat and free of distortion.

Finish: Finish coat shall be electrostatically applied powder coat enamel properly cured to paint manufacturer specifications to achieve optimum performance. All lockers shall be painted inside and outside with the same color.

Powder Coat: Dry thickness of 1 to 1.2 mils (0.025 to 0.03 mm).

Color: As selected from manufacturer's standard colors.

Gear Lockers – Same as above with the following substitutions and additions:

Doors: One piece 14 gauge sheet steel. Standard ventilation: 6 inch (152.4 mm) wide by 3/4 inch (19 mm) high horizontal louvers arranged in two groups of six.

Optional ventilation: 3/4 inch (19 mm) wide by 1-1/2 inch (38 mm) high diamond-shaped perforations or 3/4 inch (19 mm) wide by 1/4 inch (6.4 mm) high security mini louvers. Solid doors.

Door Frames: 16 gauge formed in a channel shape with continuous vertical door strikes.

Hinges: Continuous type: 16 gauge piano hinge measuring full height of door. Welded to door and attached to locker frame using steel rivets.

Door Handles and Latching

Cremona Latching: Handle shall be a heavy duty turn handle that secures the door at three points. The top and bottom frames are engaged with 3/8 inch (9.5 mm) steel rods, and a 1/8 inch (3 mm) thick center latch engages at the side. Double door configurations shall consist of a left hinged door secured its full length by the right hinged door when latched.

Handle Assembly shall be secured to door using a threaded lock nut to facilitate adjustment and removal for repair if necessary. Welded handle assemblies shall not be accepted.

Single Point Latch: 24 inch wide single door only. Recessed handle with integral pull and 11 gauge steel hasp welded to locker frame.

Multiple Point Latch: 24 inch wide single door only. Recess finger-lift control handle in door, positive automatic type latching, whereby locker may be locked when open, then closed without unlocking.

Steel Lockers

Penco's Full Range of Lockers

Penco has been building lockers for decades that last for decades and has become a part of the fabric of American life. Look in any school and chances are you'll find Penco's lockers in the athletic department, field house, faculty break room and of course, lining the corridors.

School lockers may be Penco's foundation, but the spectrum of products doesn't end there. Penco has locker solutions for recreation centers, health clubs, hospitals, back office and industry break rooms, while at the same time delivering the widest range of solutions to serve first responders in the military, law enforcement and fire and rescue professions.

The **Vanguard** line is Penco's traditional range of steel lockers designed for many uses including school corridor lockers and employee lockers. Each latch hook features a noise-reducing rubber bumper for quieter operation.

Standard Guardian lockers build upon the design features of the Vanguard series with several enhancements and options that give it a distinctive look. Our one piece deep drawn Classic III stainless steel recessed handle is part of every Guardian. It eliminates protrusions from the locker front and accepts a padlock or a built-in lock.

Penco's **Invincible II** athletic lockers are an exceptionally attractive and durable choice for gym lockers. Ideal for applications that require a high degree of ventilation and strength, or where visual inspection of locker contents is desired.

Additional Penco locker lines include: All-Welded, Angle Iron, Stadium and Patriot.

Single Tier Lockers include a shelf

Classic III Recessed Handle

Continuous Hinge, available on all lockers other than Vanguard

Standard full-loop 5-knuckle design hinge

Vanguard Die-Cast Handle

Defiant II Single Point Latch

Friction Catch Door Pull



Vanguard Single Tier

Guardian Double Tier

Invincible II Triple Tier

Invincible II Six Tier

Metal Fabrication Group

Corporate Information




The parent company of Penco Products and its affiliates is Industrial Manufacturing Company (IMC). IMC and its international arm, IMCI, are a proud family of companies that produce a wide variety of innovative products for industry. With more than 3,500 employees and 30 worldwide manufacturing, sales and distribution facilities, it produces aircraft and aerospace ducting systems, gears, lubrication systems, bleachers, steel and plastic lockers, storage systems, steel mezzanines, high-performance strainers, car and truck components, industrial hoses and industrial expansion joints.

Although each IMC and IMCI company operates independently, common to all of them is a profound respect for the integrity of

established industrial principles and a practical openness to applications of new technology. With individual histories spanning decades – and in two cases more than a century – the IMC and IMCI companies are time-tested leaders in their national and global markets.

Each IMC and IMCI subsidiary strives to tailor its products and services to the wishes of its customers, and each company's success has been built on the development of enduring customer relationships. They take pride in providing not only products of consistently high quality, but also in flexible and responsive service and in realistically competitive prices.

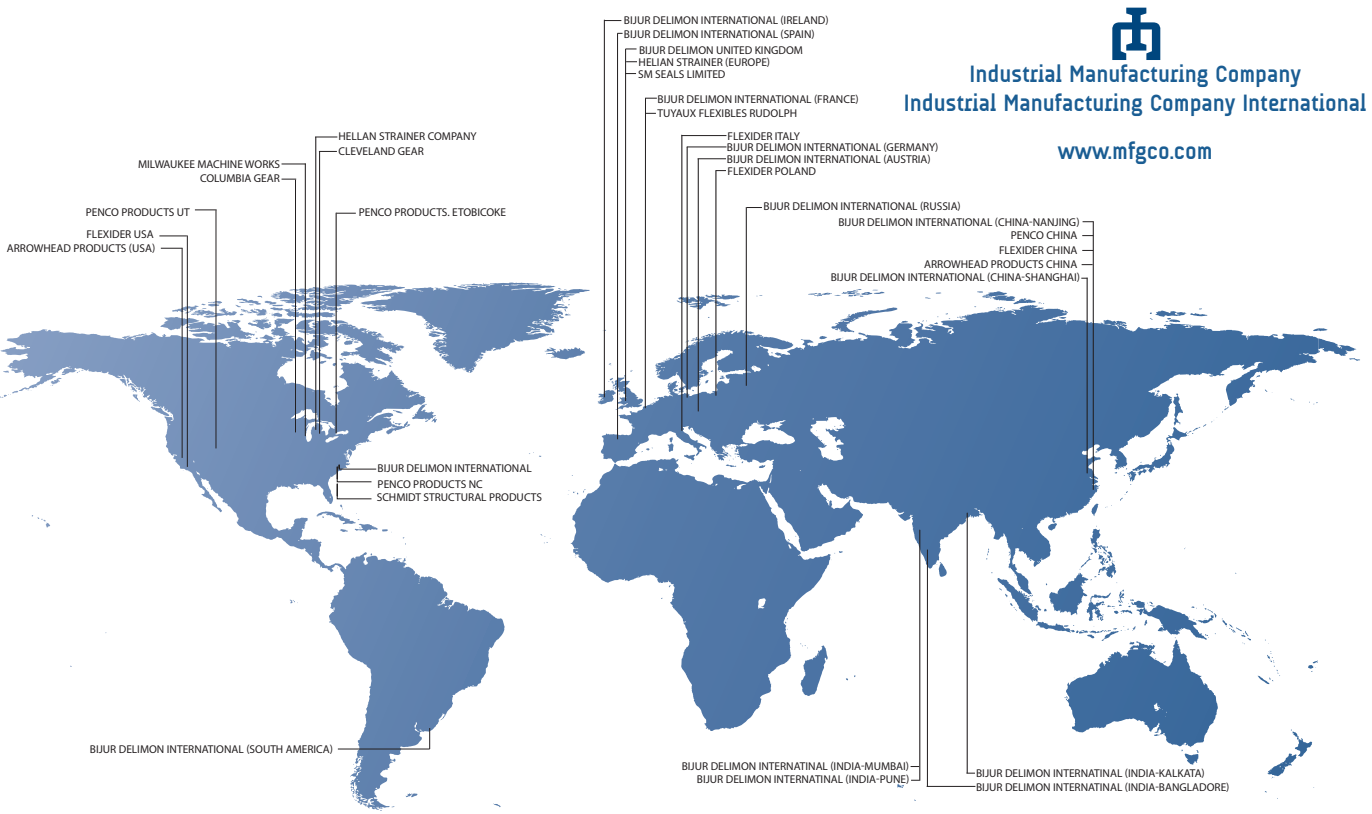



www.pencoproducts.com



Every customer's first choice to transform space into safe, secure and effective storage.

Your source for quality steel storage products and more!



Lockers



Multi-Level & High Rise Shelving



Shop Furniture & Cabinets



RivetRite® Shelving



Bleachers & Team Benches



Pallet Racks




Wide Span Shelving



Garment Lockers • Hygiene Products



Work Platforms & Safety Products

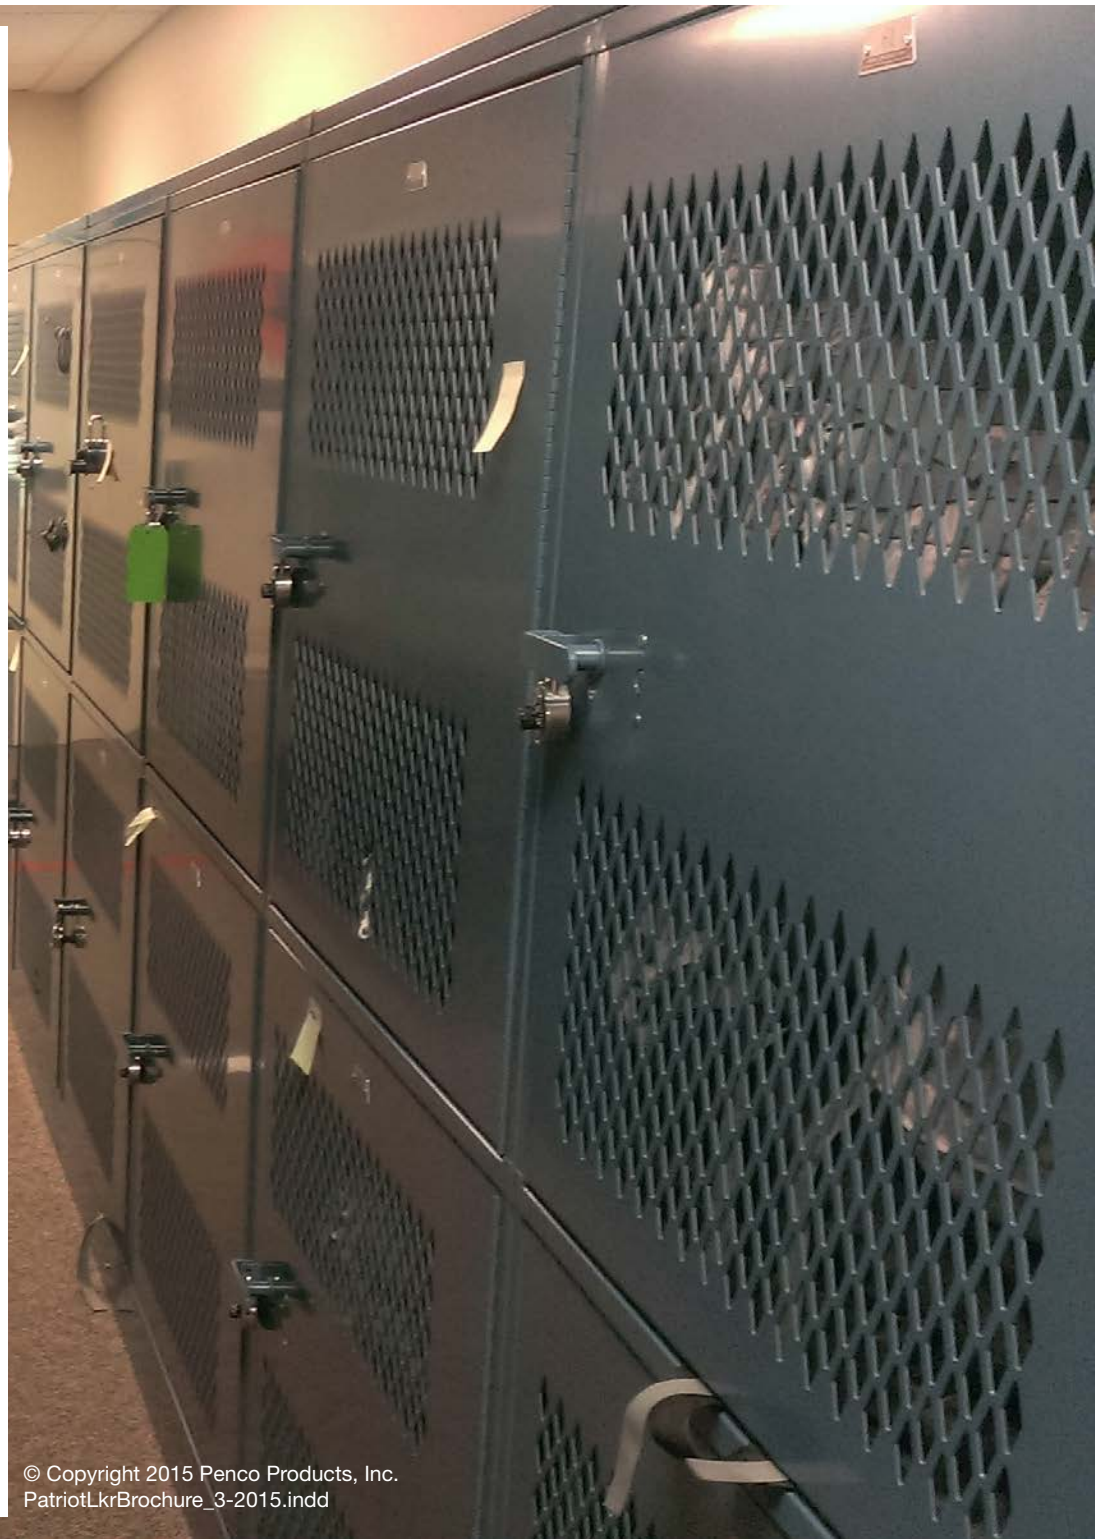

© Copyright 2015 Penco Products, Inc. PatriotLkrBrochure_3-2015.indd