

Erectomatic[®]
INDUSTRIAL SHELVING



About Penco

The need for storage products is universal and Penco has grown a wide spectrum of solutions to fill that need. In doing so, Penco has become one of America's largest and most trusted suppliers of storage and work-area products. With state-of-the-art U.S. manufacturing facilities and QuickShip Distribution Centers strategically located throughout the United States, Penco is positioned to best serve your needs.

Market sectors served by Penco include educational, healthcare, and government facilities, as well as offices, manufacturing companies, distribution warehouses, retail outlets, sports arenas and community parks.

Shelving and pallet rack products are popular with warehousing and manufacturing applications, ranging from a few units to multi-level and high rise applications.

Lockers are widely used in educational facilities, fitness centers, healthcare, military, emergency response, commercial and industrial locations.

Other products such as storage cabinets, work benches and shop furniture are used wherever material gets shipped, received or stored.

Penco's History

In 1869, a man named L. Lewis
Sagendorph fulfilled his ambition to begin
his own company that would produce
the finest metal products in America.
He called his fledgling business the Penn
Metal Corporation of Pennsylvania, and
began by making steel culvert pipe on
Oregon Avenue in South Philadelphia.



Over the years, Penn Metal's product lines broadened to include lockers, shelving and even aircraft landing mats. A reputation for quality fabrication spread, and the company's influence became nationwide. In the 1950's, the name was shortened to Penco Products and the plant and offices were expanded to a modern facility in Oaks, Pennsylvania, near Valley Forge.

In 2001, the manufacturing facility was moved from Oaks to a 475,000 square foot manufacturing facility in Hamilton, North Carolina, allowing significant room for expansion. In 2013, the corporate headquarters was moved from Skippack, Pennsylvania to Greenville, North Carolina.



Customer Service

Penco's Customer Service staff is a customer friendly, knowledgeable team that is dedicated to excellence in service delivery and communication. The team is based at Penco's Greenville, NC headquarters.

Our goal is to provide professional, courteous, timely and accurate service to every customer in a fair, consistent and accessible manner. Penco's distributor partners and customers are our number one priority and focus.

pencoproducts.com | 800.562.1000





Shelving Highlights / Contents

Contents

Introduction	2-5
Units	6-10
Components	11-13
Accessories	14-15
Multi-Level Components/Hardware	15-16
Shelves	17
Multi-Level Shelving	18-19
Grating	20
Stairs	21
Specifications	22
Colors	23



The Erectomatic Hi-Performance Shelving System is designed for greater strength, durability and versatility. Start with a single-tiered system today and expand into high density, multi-level or high rise systems tomorrow. At the heart of the system is the hi-performance welded box-beam flange shelf designed to be:

- Stronger capacities from 400 lbs to 2,000 lbs!
- Simpler no need for shelf reinforcing channels...even for extra heavy duty capacity shelving. That means fewer parts, less expense.
- Versatile can be used with your choice of four posts types.

Along with the box-beam shelf, the Erectomatic Hi-Performance Shelving System features Beaded Posts, Angle Posts, Welded T-Posts, Heavy Duty H-Posts and a one-piece shelf clip with a complete line of accessories that can be added as your storage requirements change.

Together, these high quality shelving components provide safe organized storage that is designed to allow for easy modifications and future expansion to meet your changing needs.

Erectomatic Beaded Posts

Beaded front and welded together at rear flange for strength. Flush to permit straight-in/straight-out shelf installation or shelf changing. Enables full use of the shelf width for storage. No dead space behind post. Provides easy independent vertical shelf adjustment on 1-1/2" centers. For use in the front of the unit only. See page 11 for more information.

Erectomatic Offset Angle & T-Posts

Used at the rear of the unit these posts are punched on 1-1/2" centers to allow quick, independent shelf adjustment. T-Posts consist of two angle posts welded together. They are used as common posts between units for faster assembly and fewer parts.



See page 11 for more information.

Erectomatic Heavy Duty H-Posts

All the advantages of the Flush Beaded Posts plus more than two times the load-carrying capacity. These heavy duty posts are common to front or rear and can support high rise or high density storage systems using standard Erectomatic components throughout. See page 12 for more information.



Erectomatic One Piece Shelf Clip

A non-intrusive one piece compression clip, designed to secure the shelf to any Erectomatic post without intruding into the area to be devoted to storage. Four clips are provided with each shelf. See page 16 for more information.





Erectomatic Hi-Performance® Shelves



Manufactured from high strength steel, front and rear flanges are formed into a tubular box shape and welded to the underside of the shelf on 3" centers for superior strength. Shelf corners are lapped and welded and sides are double flanged. A special design feature keeps clips snug against the shelf regardless of shelf class. Available in four load capacity classes. Sizes up to 48" wide and 36" deep. Shelves are punched to accept accessories

such as dividers, label holders, bin fronts and base strips. For use with all Erectomatic posts. Can be independently installed or re-positioned using four one-piece compression clips. See page 17 for more information.

Erectomatic


General Information

Post Load Capacity Information

Post calculations should always be based on applied loads, shelf spacing and the allowable load for any post. To determine the actual load for any post, use the following procedure.

- a. Add the shelves in each unit multiplied by the load for each shelf. Do not include the bottom shelf which is 3" above the floor in your count.
- b. Divide the result by 2 to achieve loading to intermediate posts, and by 4 to achieve loading totals for posts located at aisle ends.
- The resulting numbers will be the load superimposed on each post.
- d. Check the superimposed load with the allowable load shown in the chart below.

If your shelving installation is in an area where seismic activity may occur, please contact Penco Products for design assistance.

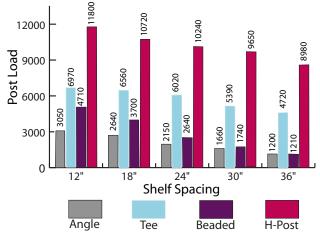


All post capacities shown are based on the latest AISI Design Manual for cold-formed members.

Sway Braces

Open shelving units, 87' high or less, must have at least one set of side sway braces per side and one set of back braces. Both side and back braces may be common with adjacent units. For multiple level, deck-over or high-rise shelving structures, the lowest set of braces should be within 6" of the floor. For posts over 87" high up to 123", order two sets of side and rear braces for each unit. Posts taller than 123" may require additional bracing.


For brace location requirements in regions where there is seismic activity, contact Penco Products for assistance.



Unit Growth


Beaded Post Shelving

For "D" — Single Face add 3/16" to nominal shelf depth. For "D" — Double Face add 3/8" to nominal shelf depth.

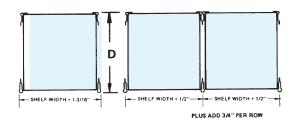

H-Post Shelving

For "D1" — Single Face add 5/16" to nominal shelf depth.
 For "D1" — Double Face add 13/16" to nominal shelf depth for closed models, and 29/32" for open models.

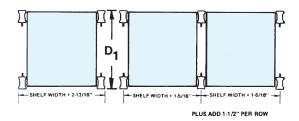

NOTE:

Widths of Erectomatic posts should be added to the nominal shelf width in any floor plan to determine the overall shelving width. Check "D" and "D1" dimensions depth.


The Most Reliable Shelf Test Method in the Industry

Test methods simulate actual applications to the highest degree possible. Evenly distributed static loads of boxed hardware are spaced to prevent "bridging" (product stacked together forms a mass like a stone archway resulting in a false safe load) to determine the maximum safe load for each size and type of shelf.





Versatile Shelving With Accessories

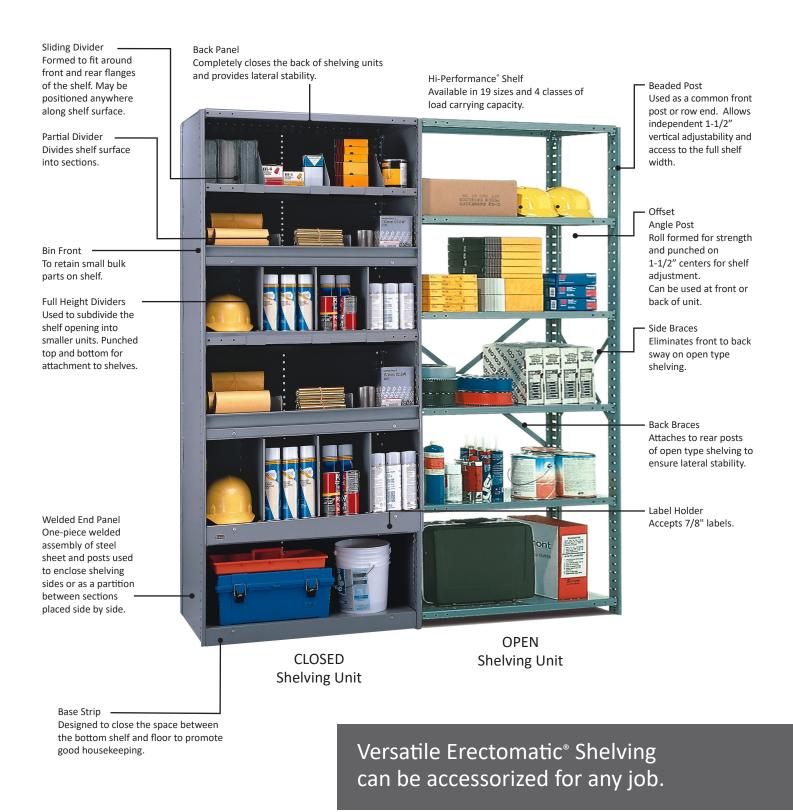

5

Erectomatic

Open Shelving Units



All Units Are 87" High and have Heavy Duty Hi-Performance® Shelves

Open shelving is the most basic method of storing packaged or bulky items. Units feature Beaded Posts at the front of the unit and Offset Angle or T-Posts at the rear and are stabilized by side and back sway bracing. All starting units are complete and free standing. Open starting units utilize beaded front posts with offset angle posts at the rear. Adjoining open shelving units consist of shelves,

1 beaded post, 1 T-post, 1 set of side sway braces and 1 set of back sway braces.

When installing a row of shelving with starting and adjoining units, a rear angle post from the starting unit is replaced with the T-Post supplied with the adjoining unit, and is used in common between the units. The angle post from the starting unit is used at the end of the row.



Back-to-back shelving utilizes common back braces.









Many other sizes are available.

5 Shelves

6 Shelves

7 Shelves

8 Shelves

ivially 0	ther sizes are a	vallable.	5 Sileives	o sileives	/ Sileives	o Sileives
Width	Depth	Height	Starting	Starting	Starting	Starting
	12"	87"	H51012	H51112	H51212	H51312
36"	18"	87"	H51018	H51118	H51218	H51318
Wide	24"	87"	H51024	H51124	H51224	H51324
Units	30"	87"	H51030	H51130	H51230	H51330
	36"	87"	H51036	H51136	H51236	H51336
	12"	87"	H57512	H57712	H57912	-
42"	18"	87"	H57518	H57718	H57918	-
Wide	24"	87"	H57524	H57724	H57924	-
Units	30"	87"	H57530	H57730	H57930	-
	36"	87"	H57536	H57736	H57936	-
	12"	87"	H56912	H57112	H57312	-
48"	18"	87"	H56918	H57118	H57318	-
Wide	24"	87"	H56924	H57124	H57324	-
Units	30"	87"	H56930	H57130	H57330	-
	36"	87"	H56936	H57136	H57336	-
Width	Depth	Height	Adjoining	Adjoining	Adjoining	Adjoining
	12"	87"	H51012A	H51112A	H51212A	H51312A
36"	18"	87"	H51018A	H51118A	H51218A	H51318A
Wide	24"	87"	H51024A	H51124A	H51224A	H51324A
Units	30"	87"	H51030A	H51130A	H51230A	H51330A
	36"	87"	H51036A	H51136A	H51236A	H51336A
	12"	87"	H57512A	H57712A	H57912A	-
42"	18"	87"	H57518A	H57718A	H57918A	-
Wide	24"	87"	H57524A	H57724A	H57924A	-
Units	30"	87"	H57530A	H57730A	H57930A	-
					11570264	
	36"	87"	H57536A	H57736A	H57936A	-
	36" 12"	87" 87"	H57536A H56912A	H57736A H57112A	H57936A H57312A	-
48"						-
48" Wide	12"	87"	H56912A	H57112A	H57312A	-
	12" 18"	87" 87"	H56912A H56918A	H57112A H57118A	H57312A H57318A	-
Wide	12" 18" 24"	87" 87" 87"	H56912A H56918A H56924A	H57112A H57118A H57124A	H57312A H57318A H57324A	-



Closed Shelving Units



All Units Are 87" High and have Heavy Duty Hi-Performance® Shelves End panels, T-panels and back panels provide stability and protection for stored items. Front base strips are included. Locking doors may be added for greater security. All starting units are complete and free standing. Closed starting units use welded end panels. Closed adjoining units consist of shelves, 1 T-Panel, 1 base strip and a back panel.

When installing a row of shelving with starting and adjoining units, an end panel from the starting unit is replaced with the T-Panel supplied with the

the starting unit is replaced with the T-Panel supplied with the adjoining unit, and is used in common between the units. The angle post or end panel from the starting unit is used at the end of the row.

Back-to-back shelving utilizes common back panels.













Many other sizes are available.

5 Shelves

6 Shelves

7 Shelves


8 Shelves

	ther sizes are av	valiable.	5 Shelves	6 Shelves	/ Shelves	8 Shelves
Width	Depth	Height	Starting	Starting	Starting	Starting
	12"	87"	H52012	H52112	H52212	H52312
36"	18"	87"	H52018	H52118	H52218	H52318
Wide	24"	87"	H52024	H52124	H52224	H52324
Units	30"	87"	H52030	H52130	H52230	H52330
	36"	87"	H52036	H52136	H52236	H52336
	12"	87"	H57612	H57812	H58012	-
42"	18"	87"	H57618	H57818	H58018	-
Wide	24"	87"	H57624	H57824	H58024	-
Units	30"	87"	H57630	H57830	H58030	-
	36"	87"	H57636	H57836	H58036	-
	12"	87"	H57012	H57212	H57412	-
48"	18"	87"	H57018	H57218	H57418	-
Wide	24"	87"	H57024	H57224	H57424	-
Units	30"	87"	H57030	H57230	H57430	-
	36"	87"	H57036	H57236	H57436	-
Width	Depth	Height	Adjoining	Adjoining	Adjoining	Adjoining
	12"	87"	H52012A	H52112A	H52212A	H52312A
36"	12" 18"	87" 87"	H52012A H52018A	H52112A H52118A	H52212A H52218A	H52312A H52318A
36" Wide						
	18"	87"	H52018A	H52118A	H52218A	H52318A
Wide	18" 24"	87" 87"	H52018A H52024A	H52118A H52124A	H52218A H52224A	H52318A H52324A
Wide	18" 24" 30"	87" 87" 87"	H52018A H52024A H52030A	H52118A H52124A H52130A	H52218A H52224A H52230A	H52318A H52324A H52330A
Wide Units	18" 24" 30" 36"	87" 87" 87" 87"	H52018A H52024A H52030A H52036A	H52118A H52124A H52130A H52136A	H52218A H52224A H52230A H52236A	H52318A H52324A H52330A H52336A
Wide	18" 24" 30" 36" 12"	87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A	H52118A H52124A H52130A H52136A H57812A	H52218A H52224A H52230A H52236A H58012A	H52318A H52324A H52330A H52336A
Wide Units 42"	18" 24" 30" 36" 12" 18"	87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A H57618A	H52118A H52124A H52130A H52136A H57812A H57818A	H52218A H52224A H52230A H52236A H58012A H58018A	H52318A H52324A H52330A H52336A -
Wide Units 42" Wide	18" 24" 30" 36" 12" 18" 24"	87" 87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A H57618A H57624A	H52118A H52124A H52130A H52136A H57812A H57818A H57824A	H52218A H52224A H52230A H52236A H58012A H58018A H58024A	H52318A H52324A H52330A H52336A - - -
Wide Units 42" Wide	18" 24" 30" 36" 12" 18" 24" 30"	87" 87" 87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A H57618A H57624A	H52118A H52124A H52130A H52136A H57812A H57818A H57824A	H52218A H52224A H52230A H52236A H58012A H58018A H58024A H58030A	H52318A H52324A H52330A H52336A - - -
Wide Units 42" Wide Units	18" 24" 30" 36" 12" 18" 24" 30" 36"	87" 87" 87" 87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A H57618A H57624A H57630A H57636A	H52118A H52124A H52130A H52136A H57812A H57818A H57824A H57830A H57836A	H52218A H52224A H52230A H52236A H58012A H58018A H58024A H58030A	H52318A H52324A H52330A H52336A - - - -
Wide Units 42" Wide Units	18" 24" 30" 36" 12" 18" 24" 30" 36" 12"	87" 87" 87" 87" 87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A H57618A H57624A H57630A	H52118A H52124A H52130A H52136A H57812A H57818A H57824A H57830A H57836A	H52218A H52224A H52230A H52236A H58012A H58018A H58024A H58030A H58036A	H52318A H52324A H52330A H52336A - - - - - -
Wide Units 42" Wide Units	18" 24" 30" 36" 12" 18" 24" 30" 36" 12" 18"	87" 87" 87" 87" 87" 87" 87" 87"	H52018A H52024A H52030A H52036A H57612A H57618A H57624A H57630A H57636A H57012A	H52118A H52124A H52130A H52136A H57812A H57818A H57824A H57830A H57836A H57212A	H52218A H52224A H52230A H52236A H58012A H58018A H58024A H58030A H58036A H57412A	H52318A H52324A H52330A H52336A - - - - - - -




36" Wide Bin Units


Erectomatic Bin Units are for storage of smaller parts and packaged goods. Easy access to materials stored. Save time in locating and picking stock. Models are 36" wide, 87" high in depths shown, and use Heavy Duty Hi-Performance* Shelves. Enclosed back and sides. Base Strips included. Bin openings are width x height. Many other sizes are available.













Openings	Size	Openings	Size	Openings	Size	Openings	Size	Openings	Size	Openings	Size
14	18" x 12"	21	12" x 12"	32	9" x 9"	48	6" x 9"	66	6" x 6"	48	6" x 9"
14	18 X 12	21	12 X 12	4	9" x 12"	6	6" x 12"	12	6" x 9"	6	6" x 12"
										All with 3"	High Bin Fronts
Star	ting	Star	ting	Star	ting	Star	ting	Star	ting	St	tarting

Shelf Depth	Starting	Starting	Starting	Starting	Starting	Starting
12"	H52512	H52612	H52712	H52812	H52912	H53012
18"	H52518	H52618	H52718	H52818	H52918	H53018
24"	H52524	H52624	H52724	H52824	H52924	H53024
Shelf Depth	Adjoining	Adjoining	Adjoining	Adjoining	Adjoining	Adjoining
12"	H52512A	H52612A	H52712A	H52812A	H52912A	H53012A
18"	H52518A	H52618A	H52718A	H52818A	H52918A	H53018A














	Openings	Size	Openings	Size	Openings	Size	Openings	Size	Openings	Size	Openings	Size
	16 4 9	9" x 9" 9"x12" 12"x12"	12 3 6	12" x 9" 12"x12" 18"x12"	9 6 1	12" x 12" 18" x 12" 36" x 12"	6 4 12 2	6" x 12" 9" x 12" 12" x 12" 18" x 12"	12 6 12 6	9" x 9" 6" x 9" 6" x 6" 12" x 12" 18" x 12"	21	12" x 12"
1	Start	ting	Sta	rting	Star	ting	Star	ting	Sta	arting		igh Bin Fronts arting

					2 18" x 12"	With 3" High Bin Fronts
Shelf Depth	Starting	Starting	Starting	Starting	Starting	Starting
12"	H53112	H53212	H53312	H53412	H53512	H53612
18"	H53118	H53218	H53318	H53418	H53518	H53618
24"	H53124	H53224	H53324	H53424	H53524	H53624
Shelf Depth	Adjoining	Adjoining	Adjoining	Adjoining	Adjoining	Adjoining
	Adjoining H53112A	Adjoining H53212A	Adjoining H53312A	Adjoining H53412A	Adjoining H53512A	Adjoining H53612A
Depth						



Shelf Box and Ledge Units

Erectomatic Shelf Box Units are ideal for storing for drills, reamers, fasteners, and small parts. Drawers can be easily removed and taken to the work station. All models are 36" wide and 87" high, and use Heavy Duty Hi-Performance* Shelves. Bin openings are width x height. Base strip included. Many other sizes are available.

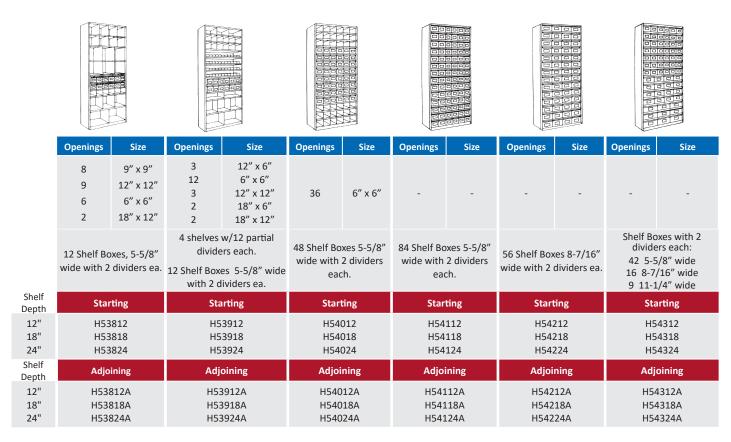

Erectomatic Ledge Units combine storage space with a work surface. Models are 36" wide and 87" high, and use Heavy Duty Shelves, in the depths shown. Closed units include front base strips. Accessorize to fit your requirement with dividers, label holders, doors, etc., selected from the component parts pages of this catalog.








		Description	Description	Openings	Size
		4 adjustable shelves above	4 adjustable shelves	12 1	12" x 9" 36" x 12"
		ledge, 3 below	,		with 3" high bin low ledge
Shelf Depth Above	Shelf Depth Below	Starting	Starting	Sta	rting
12"	18"	H5491218	H5501218	H551	11218
12"	24"	H5491224	H5501224	H551	11224
18"	24"	H5491824	H5501824	H551	11824
Shelf Depth	Shelf Depth	Adjoining	Adjoining	Adjo	ining
12"	18"	H5491218A	H5501218A	H551	1218A
12"	24"	H5491224A	H5501224A	H551	1224A
18"	24"	H5491824A	H5501824A	H551	1824A



Counter Units & Cabinet Models

Erectomatic Cabinet Models are completely enclosed with swinging or sliding doors. Doors are equipped with locks to provide security. Swinging doors have a 3-point latching, chrome finished handles, and built-in lock. Sliding doors have cylinder lock; glide on nylon rollers and guides. Models are 87" high, in the widths and shelf depths shown with Heavy Duty Shelves. Base Strips included.

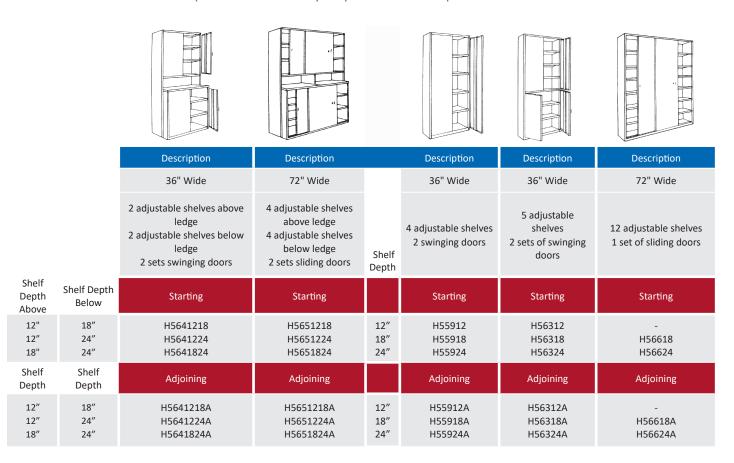

All Erectomatic Counter Units are 36" wide and 39" high. They provide neat compact storage with a smooth work surface. Shelves are Heavy Duty. Base Strip included with closed models. Counter models accept standard shelving accessories. See component pages of this catalog.







	Description	Description	Description
	2 adjustable shelves	2 adjustable shelves	2 adjustable shelves 2 swinging doors
Shelf Depth	Starting	Starting	Starting
18" 24"	H55418 H55424	H55518 H55524	H55818 H55824
Shelf Depth	Adjoining	Adjoining	Adjoining
18" 24"	H55418A H55424A	H55518A H55524A	H55818A H55824A



Shelving Components

Erectomatic Shelving Components can be ordered in any combination for all kinds of custom applications. Be certain to order shelves and posts of sufficient capacity to hold the maximum expected load (refer to the capacity information on pages 4 and 17).

Posts and panels are available in custom heights (minimum quantity may apply). Contact your representative with your requirements.

Dimensions (inches)

Width

Depth

Height

Cat. No.



Beaded Front Post

Used at front of shelving, in single units or in common with adjoining unit. Permits full access to shelf width. Allows independent adjustment of shelves on 1-1/2" centers.

-	-	39	H0023C
-	-	75	H0026C
-	-	87	H0027C
-	-	99	H0028C
-	-	123	H00210C



Offset Angle Post

Angles for rear of single or end units. Slotted on 1-1/2" centers to permit easy shelf adjustment.

-	39	H0043C
-	75	H0046C
-	87	H0047C
-	99	H0048C
-	123	H00410C
	-	- 75 - 87 - 99



T-Post

Constructed by spotwelding two offset angle posts together. Use at rear of shelving when adjoining units are added to form a continuous row.

-	-	39	H0063C
-	-	75	H0066C
-	-	87	H0067C
-	-	99	H0068C
_	_	123	H006100



Foot Plate, Erectomatic Post (zinc plated)

1/8" thick with mounting bracket for bolting to post. Has 7/16" diameter hole for floor anchor bolts. Includes hardware to fasten to post. If shims are required, use shim No. H026 (page 12).

2-1/4 3-1/2 - H050H

Dimensions (inches)

Width

Depth

Height

Cat. No.

Heavy Duty Footplate for Beaded, Angle and Tee Posts - 7 ga.



Includes two mounting brackets and intended for use in high seismic areas or in conditions where post loading is intended to be spread over a larger area, such as on a mezzanine/work platform elevated deck. Footplate is drilled to accept 3/8" floor anchors, and can be used with 9281 3/8"x 3-3/4" wedge anchors to meet IBC 2003/2006 building code requirements in high seismic areas.

2-3/8 5-1/2 - 1ACX326H



Heavy Duty Shim - 7 Ga.

Fits under 1ACX326H footplate for leveling as needed.

2-3/8 5-1/2 - 1ACX330



Concrete Floor Anchor

Use the longer anchor # 9281 in seismic zones higher than 2A.

3/8	-	2-1/4	9280
3/8	_	3-3/4	9281



Splice Channels for Beaded, Angle and T-Post

Used when splicing posts. Splice and aisle supports use common hardware. Replaces Part No. H009H

- - HXAS071H

End Panel (welded 1 piece)

Welded one-piece construction for easy assembly. Consists of beaded front post, offset angle post and one-piece side panel welded together on 6" centers. For left or right ends of single units or row ends.




-	12	39	H0921203C
-	12	75	H0921206C
-	12	87	H0921207C
-	12	99	H0921208C
-	12	123	H0921210C
-	15	87	H0921507C
-	18	39	H0921803C
-	18	75	H0921806C
-	18	87	H0921807C
-	18	99	H0921808C
-	18	123	H0921810C
-	24	39	H0922403C
-	24	75	H0922406C
-	24	87	H0922407C
-	24	99	H0922408C
-	24	123	H0922410C
-	30	87	H0923007C
-	36	87	H0923607C

Shelving Components

Dimensions (inches) Width Depth Height Cat. No.

T-Panel

Welded construction for easy assembly. Consisting of beaded front post, T-post and one-piece side panel welded on 6" centers. For use between units when adjoining models are added to form a continuous shelving row.



12	39	H0941203C
12	75	H0941206C
12	87	H0941207C
12	99	H0941208C
12	123	H0941210C
15	87	H0941507C
18	39	H0941803C
18	75	H0941806C
18	87	H0941807C
18	99	H0941808C
18	123	H0941810C
24	39	H0942403C
24	75	H0942406C
24	87	H0942407C
24	99	H0942408C
24	123	H0942410C
30	87	H0943007C
36	87	H0943607C




Ledge Panel

For converting open or closed type shelving models to ledge models. All-welded construction. Combines beaded front post and preformed panel into a one-piece unit. Ledge panel cover is included.

-	6	39	H0120306H
-	12	39	H0120312H
-	18	39	H0120318H

Back Panel

Punched on 1" centers at vertical edges and center for mounting to back of posts and shelves. 36" wide backs are furnished in 1 piece through 87" high; above 87" they are split horizontally. 42" & 48" wide backs are furnished in 1 piece through 51" high; bove 51" they are split horizontally. Includes back clip and hardware.



36	-	39	12500H
36	-	51	12510H
36	-	75	12530H
36	-	87	12540H
36	-	99	12550H
42	-	39	12600H
42	-	51	12610H
42	-	87	12640H
42	-	99	12650H
48	-	39	12700H
48	-	51	12710H
48	-	87	12740H
48	-	99	12750H

Dimensions (inches)

Width

Depth

Height

Cat. No.

Side Sway Braces, For Beaded Post Unit (Pair)



One pair forms a set which bolts to the front and rear posts for stability. Can be used in common between adjoining units. NOT for use with H-Posts.


-	12	-	12015S
-	15	-	12019S
-	18	-	12026S
-	24	-	12034S
-	30	-	12045S
_	36	_	120/105

Back Sway Braces, For Back, T, & H-Post, (Pair)



Each pair forms a set which bolts to posts at rear of unit for stability. Can be used in common with back to back units.

36	-	-	12036F
42	-	-	12042F
48	-	-	12048F



H-Post

Very strong tubular design. 1-1/2" wide x 2-15/16" deep in heights shown. Used in front and rear post positions. Sides slotted on 1-1/2" centers for shelf clip adjustment. Has more load carrying capacity than beaded or angle posts.

		87	H0037C
-	-	0/	HUU3/C
-	-	99	H0038C
-	-	123	H00310C
_	_	147	H00312C



Foot Plate,

H-Post, Light/Medium Duty

Mounting bracket welded to top for bolting inside H-Posts. Base plate has 7/16" diameter hole for floor anchor bolts.

3-1/2 2-1/4 - H025H



Foot Plate, H-Post, Heavy Duty

Mounting bracket is welded to top for bolting inside H-Post. Base plate is 3/8" thick and has four 7/16" diameter holes for receiving the embosses in shim plate (No. H016) and for floor anchor bolt.

4 3-1/2 - H015H

Shim Plate, For Foot Plate, Light/Medium Duty



Fits under foot plate (Cat. No. H025H or H050H) for leveling. Has (1) 7/16'' diameter hole which aligns with hole in foot plate to permit anchoring to floor.

3-1/2 2-1/4 - H026



Cat. No.

H027H

Shelving Components

Width **Dimensions (inches)** Depth Height Cat. No.

H-Post, Heavy Duty

Fits under foot plate (Cat. No. H015H) for leveling. Has (2) 7/16" diameter holes which align with footplate holes to permit anchoring to floor.

> 3-1/2 H016

Side Panel, H-Post

Provides closed side panels sections where desired. Punched on 6" centers for mounting to front and rear H-Posts. Attach 1/4 x 20 pan head screws (included).

-	18 18	39 87	H0911803H H0911807H
-	24 24	39 87	H0912403H H0912407H
-	36	39	H0913603H
-	36	87	H0913607H

Connector Strip, For H-Post Back

For connecting Back Panels or braces to rear H-Posts; punched on 1" centers. 2-1/16" wide pieces are for back posts at row ends. 3-1/8" wide pieces are for adjoining intermediate back posts, and are punched at outside vertical edges & center. Hardware included.

2-1/16	-	39	H1143H
2-1/16	-	51	H1144H
2-1/16	-	87	H1147H
3-1/8	-	39	H1153H
3-1/8	-	51	H1154H
3-1/8	_	87	H1157H

Side Sway Braces, H-Post (Pair)

Each pair forms a set for connecting front and rear H-Posts for stability. Can be used in common with adjoining unit (for H-Posts ONLY).

-	12	-	H34112H
-	15	-	H34115H
-	18	-	H34118H
-	24	-	H34124H
-	30	-	H34130H
_	36	_	H34136H

Splice, H-Post

For use in multi-level and high rise shelving. Fits inside two connecting H-Posts. Punched for bolting. Maintains post strength at the splice without interfering with clips or other accessories. Hardware included.

> 9-3/4 H010H



Combination Clip, H-Post (zinc plated)



Mounts to rear H-Posts to provide anchor point for back sway braces. Also used to connect H-Posts and common back panels or common back sway braces together in back to back models. Hardware included. Not for use in high seismic areas.

Support Brace for Bottom Shelf (For Class 3 Only)




Used only on Class 3 bottom shelves to support center support hat section. Positioned in center of shelf; rests on floor. Includes hardware.

> 5-1/8 2-1/16 1-3/4 H131H


H-Post Beams

Beams with H-Post end connectors for use with plywood decking. Support Angle(s) are required (see below).



Plywood Support Angles (For H-Post Beams)

Use 1 for 36" & 42" 2 for 48", 3 for 72" & 84", 4 for 96" Beams.



Counter Top

36

Heavy duty steel working surface with cornice at front and rear. Use End Caps for finishing cornice on ends. Hardware included.

H1953618H

36	24	- 1	H1953624H
Standard H-Post Beam Capacities (With Support Angles)		36-1/2 42-1/2 48-1/2 72-1/2 84-1/2 96-1/2	2500/Pr. 2500/Pr. 2500/Pr. 2500/Pr. 1760/Pr. 1500/Pr. 1350/Pr.
All Capacities are based on uni	iforr	mly distributed loa	ids in pounds.

18

End Caps for Counter Top, (Pair)



Provides a finished cornice on extreme ends of counter top applications. Sold in pairs; hardware included.

-	18	-	H20118H
-	24	-	H20124H



Shaped to fasten directly to the bottom shelf



0

0

0 0

0 0





Cat. No.

Erectomatic

Accessories

Dimensions (inches)

Rase Stri

Base Strip

Width

Depth

Shaped to fasten dirextly to the bottom shelf front to close the gap beneath it and the floor. Normally used with closed shelving. Includes hardware. Note: 4-1/2" high model is for use with H-Posts attached to footplates and in x-ray storage units.

Height

Cat. No.

36	-	3	14520H
36	-	4	1450H
36	-	4-1/2	H23336H
42	-	3	14530H
42	-	4	14560H
48	-	3	14540H
48	-	4	14570H



Punched for attaching to front flange of shelves. Accepts 7/8" high labels. Attaches with plastic button fasteners (included).

36	-	-	13920H
42	-	-	13930H
48	_	_	13940H

Bin Front

Offset type double formed at top and triple flanged at bottom to telescope over shelf flange. Hardware included.



36	-	1	14210H
36	-	2	14220H
36	-	3	14240H
42	-	3	14340H
48	-	3	14440H



Width Divider

Front edge beaded; top, bottom and rear edges are flanged. Attaches with plastic button fasteners (included). For Class 3 shelving applications, contact your representative regarding special notching. Note: 16-1/2" high model is for x-ray unit.

Height

Depth

-	12	6	15600H
-	12	9	15620H
-	12	12	15640H
-	12	18	15670H
_	15	6	15700H
-	15	12	15740H
	10	C	1500011
-	18	6	15800H
-	18	9	15820H
-	18	12	15840H
-	18	16-1/2	15865H
-	18	18	15870H
-	18	24	15890H
-	24	6	15900H
-	24	9	15920H
-	24	12	15940H
-	24	18	15970H
-	24	21	1DVX082H
-	24	24	15990H
_	36	18	16170H

Partial Divider

Partitions shelves from front to rear. Flanged and punched for shelf attachment. Has rounded top corners for safety. Attaches with plastic button fasteners (included).

-	12	2	16395H
-	12	4	16410H
-	18	2	16397H
-	18	4	16430H
-	24	4	16440H

Sliding Divider, For Box Formed Shelf

Formed to fit around front and over rear edges of shelf. Can be positioned horizontally anywhere along shelf surface. No hardware required.



-	12	4	1H4124C
-	12	6	1H4126C
-	18	4	1H4184C
-	18	6	1H4186C
-	24	4	1H4244C
-	24	6	1H4246C



Accessories & Multi-Level Shelving Parts

Dimensions (inches)

Width

Depth

Height

Cat. No.

Width

Depth

Height

Cat. No.



Swinging Doors, With Lock & 2 Keys

Pre-hung at the factory on a welded frame for easy assembly. Includes 3-point latch system with locking handle and 2 keys. Can be used on standard ledge or counter units up to 87" high. Six Universal Clips required for attaching doors to shelving posts. Order separately.

36	-	36	H3003636
36	-	48	H3003648
36	-	85	H3003684
48		36	112004926
48	-	30	H3004836
48	-	85	H3004884



Sliding Doors, With Lock & 2 Keys

Flanged on all 4 sides and reinforced. Doors slide on quiet, smooth-running nylon rollers and guides. Complete with grooved key cylinder lock w/keys, mounting channels & universal clips. Designed for use on side by side models with shelf at top. 12 Universal Clips required for attaching to doors to shelving posts. Order separately.

72	-	36	H2907236
72	-	84	H2907284

Multi-Level Shelving Parts



Dimensions (inches)

Aisle Support

for Use with H-Posts

For use with H-Post shelving posts and HXAS006H Aisle Support Adaptor. Provides low profile aisle supports for use with elevated shelving walkways. Can also be used to support deck-over applications.

36	-	1-3/4	HXAS082F
48	-	1-3/4	HXAS177F



Aisle Support Adapter

Attaches to front of H-Post with two #14 x 5/8 selftapping screws and used to attach special aisle supports or other accessories.

HXAS006H



End of Aisle Kickplate

30	-	4	H2KP30
36	-	4	H2KP36
42	-	4	H2KP42
48	-	4	H2KP48



Grating Support Hanger

3	2	1	H2GS02
5	_	4	пидоли



Grating Support Angle

For Beaded or H Posts

H2GS01



Multi Level Bracket

For Beaded or H Posts

H2GS0




Multi-Level Shelving Parts/Miscellaneous Hardware

Dimensions (inches) Width Depth Height Cat. No. Dimensions (inches) Width Depth Height Cat. No.

Multi-Level Shelving Parts, continued


For Beaded Posts Only



Cross Aisle Support

Includes hardware for Beaded Posts only

30	-	4	H1CA30E
36	-	4	H1CA36E
42	-	4	H1CA42E
48	-	4	H1CA48E




Grating Support Channel

Includes hardware for Beaded Posts only

30	-	4	H2GS30E
36	-	4	H2GS36E
42	-	4	H2GS42E
48	-	4	H2GS48E


For H Posts Only



Cross Aisle Support

Includes hardware for H Posts only

30	-	4	H1CA30H
36	-	4	H1CA36H
42	-	4	H1CA42H
10	_	1	H1CA/18H



Grating Support Channel

Includes hardware for H Posts only

30	-	4	H2GS30H
36	-	4	H2GS36H
42	-	4	H2GS42H
48	_	4	H2GS48H

Touchup Paint

Spray Paint, 12 Oz. Can

012 Tawny Tan	97012	722 Patriot Red	97722
021 Gray Ash	97021	723 Light Putty	97723
028 Gray	97028	736 Burgundy	97736
052 Reflex Blue	97052	767 Cardinal Red	97767
054 Canvas	97054	806 Marine Blue	97806
055 Shamrock	97055	812 Hunter Green	97812
056 Sunburst	97056	822 Regal Blue	97822
058 Nordic Purple	97058	826 Slate Blue	97826
073 Champagne	97073	848 January White	97848
701 Spray Green	97701	949 Jet Black	97949
710 Sage Brush Yellow	97710	952 Turquoise Teal	97952
715 Lake Blue	97715		
720 Mandarin Orange	97720		

Miscellaneous Replacement Parts & Hardware



Shelf Clip, For Erectomatic Posts

One piece compression clip that is shipped in sets of 4 with each shelf ordered. Order by single pieces for replacement use only.

- - H133Z



Clip, Back Panel (Plated)

Formed to fit the bottom flange of shelf and tabbed to insert in holes in center of back panel. Holds back panel to shelf and prevents panel from bowing. Normally shipped with backs; order here for replacement use only.

- - H120C



Universal Clip, To Mount Doors

Six clips required to mount swinging doors. Twelve clips required for sliding doors. Not included with doors. Order separately.

- - H315H



Plastic Button

For attaching various shelving accessories such as dividers and label holders. Normally included with shipment; order here for replacement only.

- - 8401

Pan Head Screws

(sold in quantity of 100)

1/4-20 x 1/2	-	-	8412H
1/4-20 x 3/4	-	-	8410H
1/4-20 x 1/4	-	-	8409H
1/4-20 x 1/2 (Grade 5)	-	-	8412G5H

1/4-20 Hex Nut

(sold in quantity of 100)

-	-	-	8473H
Grade 5	_	_	8473G5F

Square Washer

(sold in quantity of 100)

- - 8408H



Hi-Performance® Shelves

Erectomatic* Hi-Performance* Shelves maximize load handling capacity through a design which shapes the front and rear flanges into rigid tubular box beams. The box shape provides two vertical surfaces in each box-flange that inherently give it a high strength-to-weight ratio. Additional reinforcing bars or angles are not used with Hi-Performance shelves.

The shelves are efficiently manufactured from high strength cold rolled steel on a modern automated roll forming mill.

For additional strength, front and rear flanges are welded to the underside of the shelf on 3" centers. Shelf corners are lapped and welded.

Shelves are available in a wide variety of sizes shown below in the capacity chart. All shelves are punched on 1.5" centers to accept shelving accessories such as dividers, label holders and bin fronts.

Erectomatic Hi-Performance Shelves and Capacities Class 1 Class 2 **Heavy Duty** Extra Heavy Duty Class 3 **High Strength Steel High Strength Steel** Extra Heavy Duty With Reinforcing* Unit Unit Cat. Capacity Capacity Capacity Width Depth No. No. 12" H1203012C H1203015C 15" 30" 18" H1203018C 24" H1203024C 12" H1203612C 800 lb H1183612C 1100 lb 15" H1203615C 800 lb H1183615C 1100 lb H1203618C 850 lb H1183618C 1200 lb 18" 2000 lb 36" 24" H1203624C 800 lb H1183624C 1250 lb 2000 lb 900 lb 30" H1203630C 500 lb H1183630C 2000 lb 36" H1203636C 500 lb H1183636C 900 lb 2000 lb 12" H1204212C 600 lb H1184212C 1100 lb 15" H1204215C 600 lb H1184215C 1100 lb H1204218C 600 lb H1184218C 1050 lb 1600 lb 18" 42" H1204224C H1184224C 1600 lb 24" 600 lb 900 lb H1204230C H1184230C 1000 lb 1600 lb 30" 625 lb 32" H1204232C 525 lb H1184232C 950 lb 1600 lb 36" H1204236C 475 lb H1184236C 900 lb 1600 lb 12" 500 lb H1204812C H1184812C 750 lb 15" H1204815C 500 lb H1184815C 850 lb 18" H1204818C 500 lb H1184818C 900 lb 1200 lb 48" 24" H1204824C 500 lb H1184824C 900 lb 1200 lb 30" H1204830C 500 lb H1184830C 750 lb 1200 lb 36" H1204836C 500 lb H1184836C 750 lb 1200 lb

A. Class 3 Side Shelf Support (pairs)

Used to support Center Support in Class 3 applications.



Class 3 Side Shelf Support		
Unit Depth	Cat. No.	
18"	1H830H	
24"	1H840H	
30"	1H850H	
36"	1H860H	

B. Class 3 Center Support

Runs left to right beneath the mid-point of the shelf for conversion to Class 3. Supported by side shelf supports.



	Class 3 Center Support		
Unit Width	Cat. No.		
36"	H13736C		
42"	H13742C		
48"	H13748C		

^{*} Class 3 Capacities are based upon the use of Extra Heavy Duty Shelves with (A) Side Shelf Supports and (B) Center Support for additional capacity. Must use nuts and bolts for shelves, not clips. All shelves are supplied with Erecotmatic Clips. All shelf load capacities are in pounds for evenly distributed loads, and include a safety factor of 1.65.

Erectomatic

Multi-Level Shelving




Penco Erectomatic Shelving Systems


Using standard components, Penco Erectomatic Shelving can be designed and configured to overcome a number of storage problems. By going UP and not OUT, tall shelving systems take advantage of factory space by capturing overhead area that is lighted, heated and paid for, while allowing valuable floor space to be used for more profitable activities.

With Erectomatic Flush Beaded Front Posts, or H-Posts for extreme loading and seismic applications, shelving systems can be built vertically. We can also supply pre-engineered components, elevated walkways, stair structures and handrails designed to meet local, state or federal codes. In Hi-Rise applications where free-path man-aboard order picking equipment is used, guide rail and cross-aisle top-ties are used to keep the structure sound.

Shelving systems can be designed as "closed" installations with solid backs and welded side panels, or as "open" style structures that are held together with side and rear sway bracing. For "pass through" order picking, H-Post with beams and a variety of decking choices are available.


All Penco Erectomatic High Performance Storage Systems are available with drawings that have been reviewed and approved by a structural engineer licensed in the state where the installation will take place.

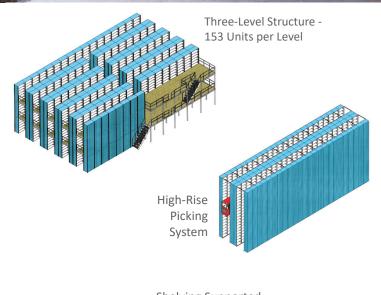

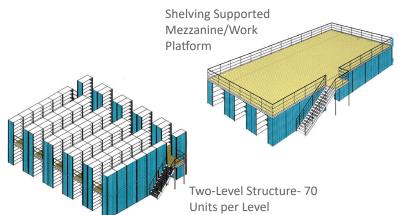



Installations

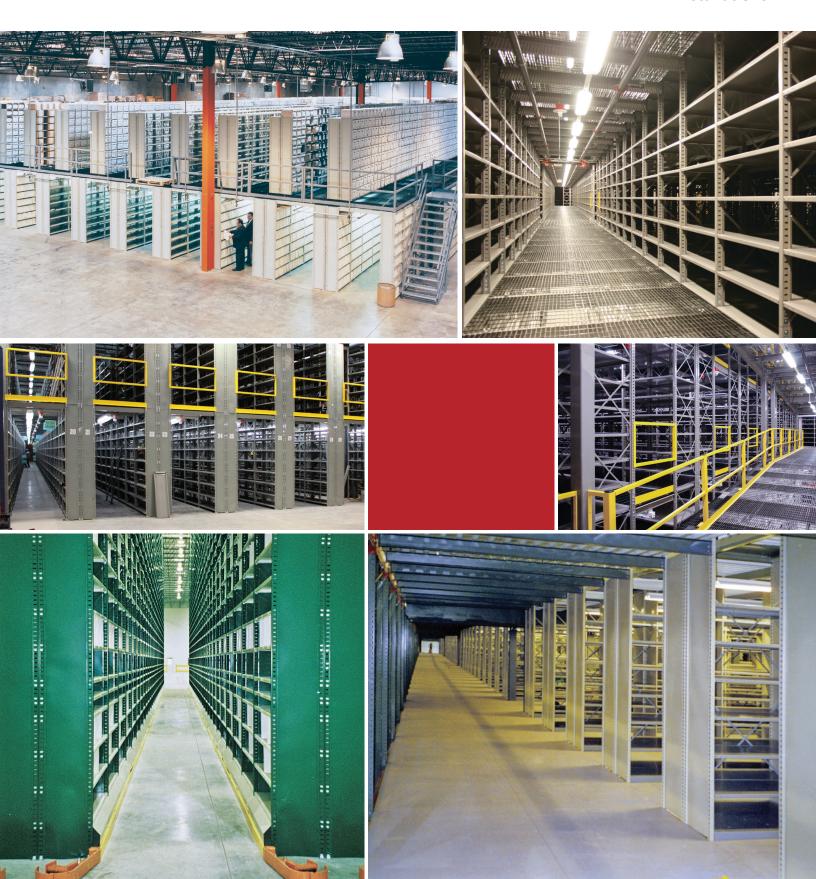

@ P E N C O P R O D U C T S











PENCO PRODUCTS, INC. | 1820 Stonehenge Drive, Greenville, NC 27858 Phone: 800-562-1000 | Fax: 800-248-1555 | general@pencoproducts.com