


ALUMINUM NO. PLATE
 ONE DBL. PRONG CEILING
 HOOK & TWO SGL. PRONG
 WALL HOOKS EA. OPENING


LOCK HOLE COVER PLATE
 STAINLESS STEEL RECESSED
 POCKET WITH PADLOCK EYE

CONTINUOUS HINGE

14GA. DOOR & 16GA. FRAME
 DOOR RECEIVES DIAMOND
 PERFORATIONS

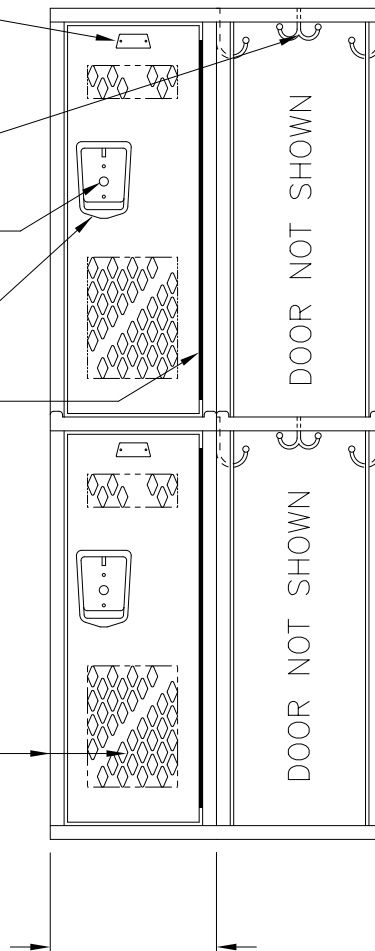

ELEVATION

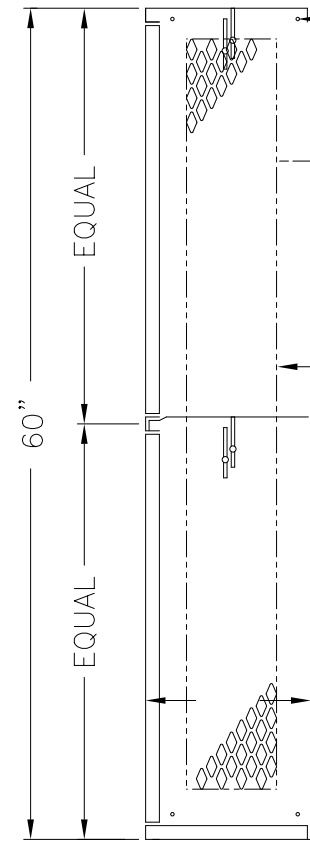

BOLT WELDED LOCKER
 UNITS TOGETHER @ 4
 PLACES

16GA. TOP, BOTTOM,
 SHELF & DIVISIONS
 DIVISION RECEIVES DIAMOND
 PERFORATIONS

18GA. BACK

SECTION @ WALL


60" HIGH DOUBLE TIER ALL-WELDED LOCKER

12" & 15" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 12", 15", 18", 21" & 24" DEEP

This drawing shows a standard Penco Product. Any modifications
 to the product must be approved by Penco Engineering. 8/6/2001



121260AW2T.dwg

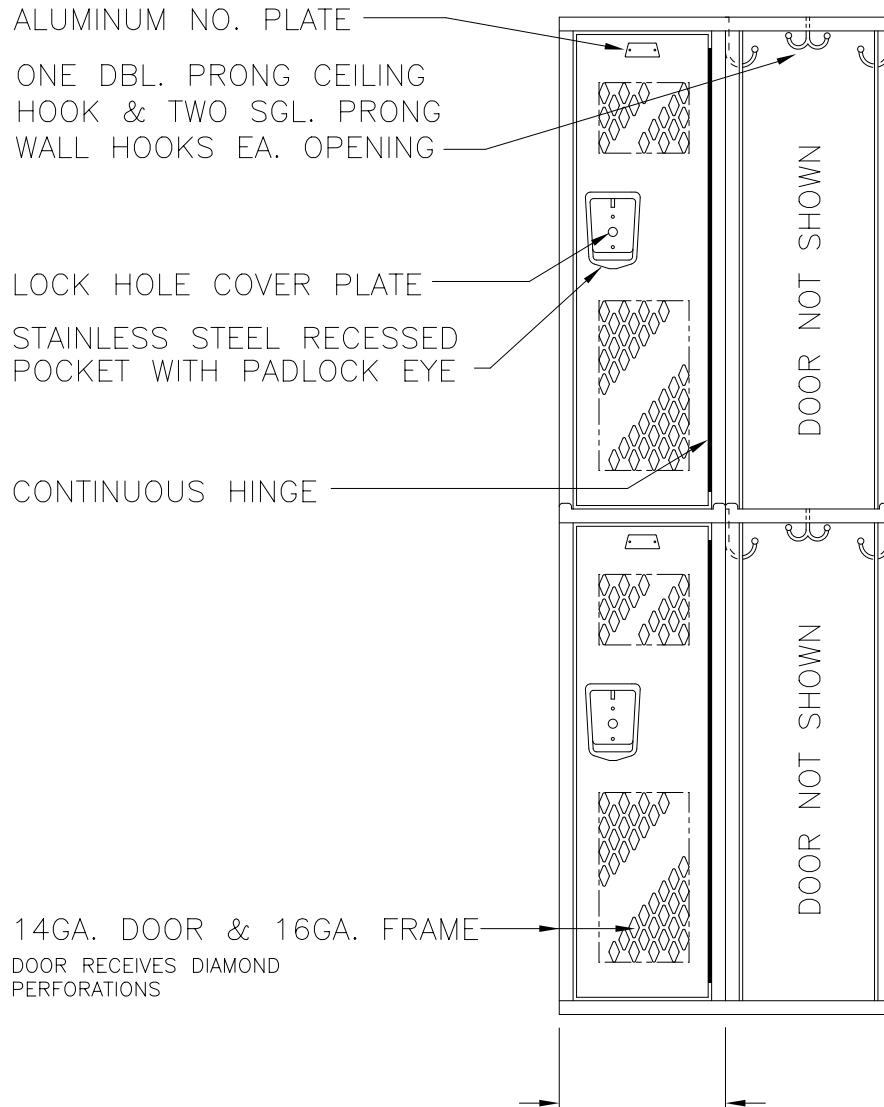


ALUMINUM NO. PLATE
 ONE DBL. PRONG CEILING
 HOOK & TWO SGL. PRONG
 WALL HOOKS EA. OPENING

LOCK HOLE COVER PLATE

STAINLESS STEEL RECESSED
 POCKET WITH PADLOCK EYE

CONTINUOUS HINGE

14GA. DOOR & 16GA. FRAME
 DOOR RECEIVES DIAMOND
 PERFORATIONS

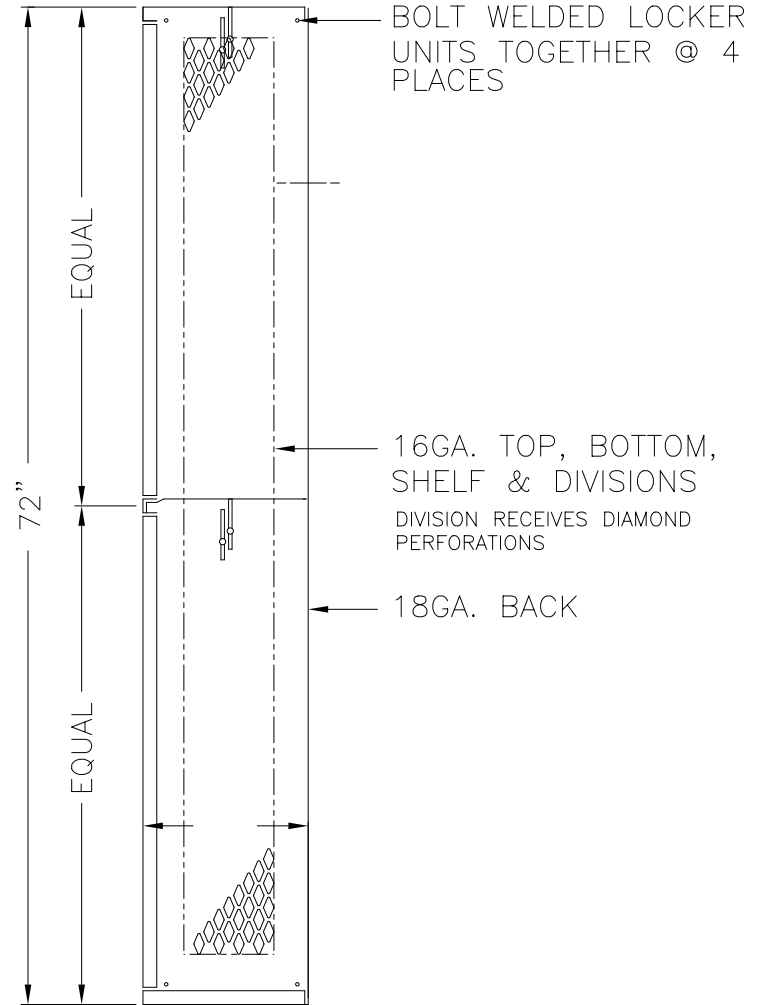

BOLT WELDED LOCKER
 UNITS TOGETHER @ 4
 PLACES


16GA. TOP, BOTTOM,
 SHELF & DIVISIONS
 DIVISION RECEIVES DIAMOND
 PERFORATIONS

18GA. BACK


ELEVATION SECTION @ WALL
 72" HIGH DOUBLE TIER ALL-WELDED LOCKER
 12" & 15" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
 TYPICAL FOR 12", 15", 18", 21" & 24" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001



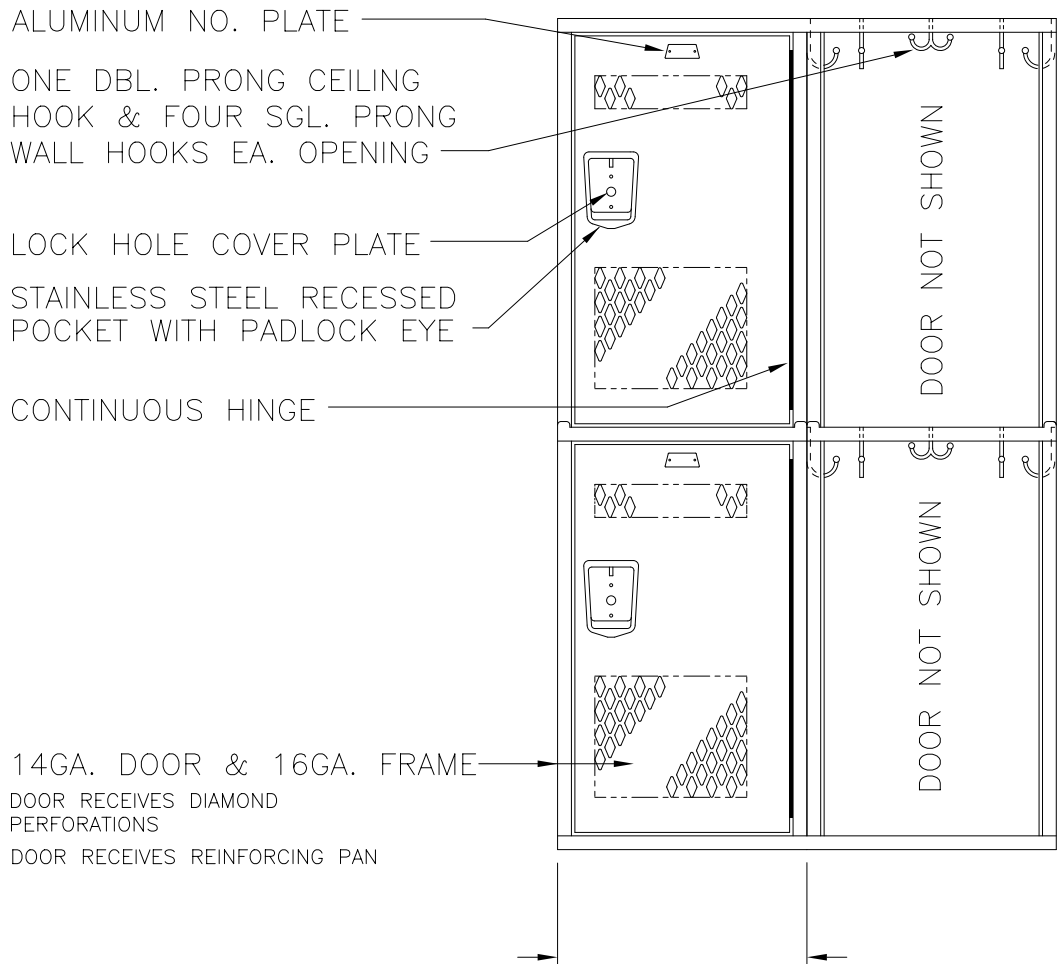

14GA. DOOR & 16GA. FRAME
 DOOR RECEIVES DIAMOND PERFORATIONS
 DOOR RECEIVES REINFORCING PAN

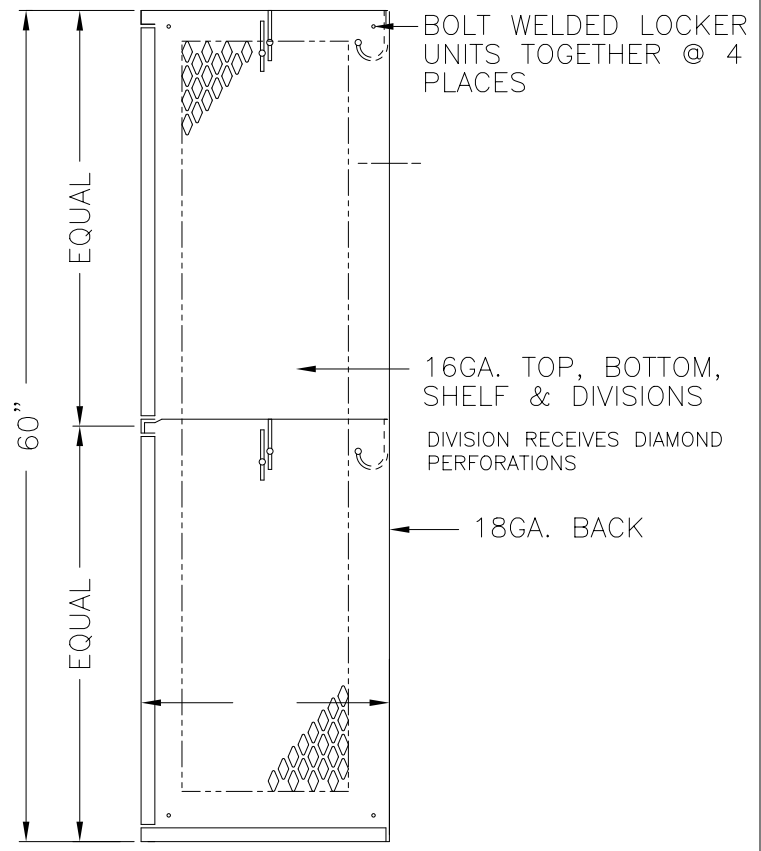

BOLT WELDED LOCKER UNITS TOGETHER @ 4 PLACES
 60"
 EQUAL
 16GA. TOP, BOTTOM, SHELF & DIVISIONS
 DIVISION RECEIVES DIAMOND PERFORATIONS
 18GA. BACK

ELEVATION

SECTION @ WALL

60" HIGH DOUBLE TIER ALL-WELDED LOCKER
TYPICAL FOR 18" & 24" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 18", 21", & 24" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001

ALUMINUM NO. PLATE

ONE DBL. PRONG CEILING
HOOK & FOUR SGL. PRONG
WALL HOOKS EA. OPENING

LOCK HOLE COVER PLATE


STAINLESS STEEL RECESSED
POCKET WITH PADLOCK EYE

CONTINUOUS HINGE


14GA. DOOR & 16GA. FRAME

DOOR RECEIVES DIAMOND
PERFORATIONS

DOOR RECEIVES REINFORCING PAN

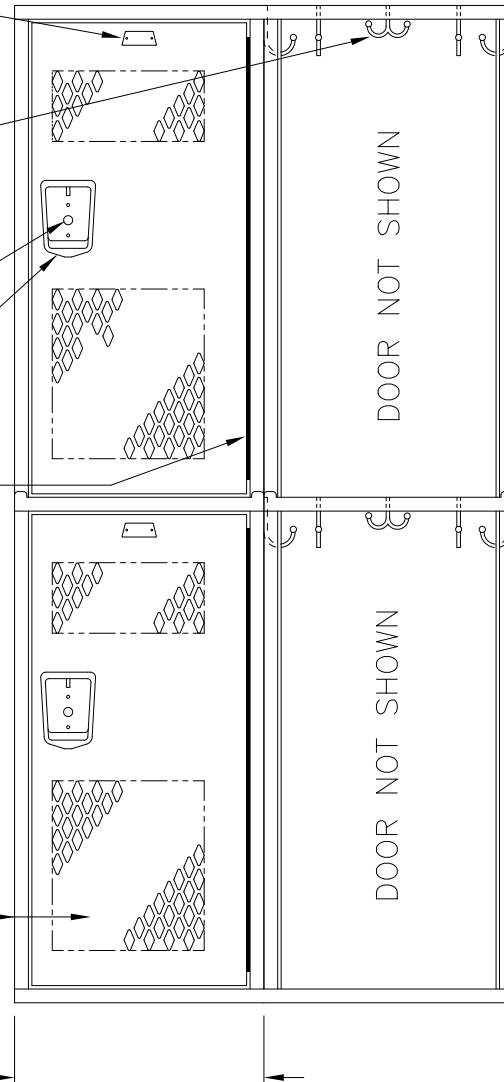

ELEVATION

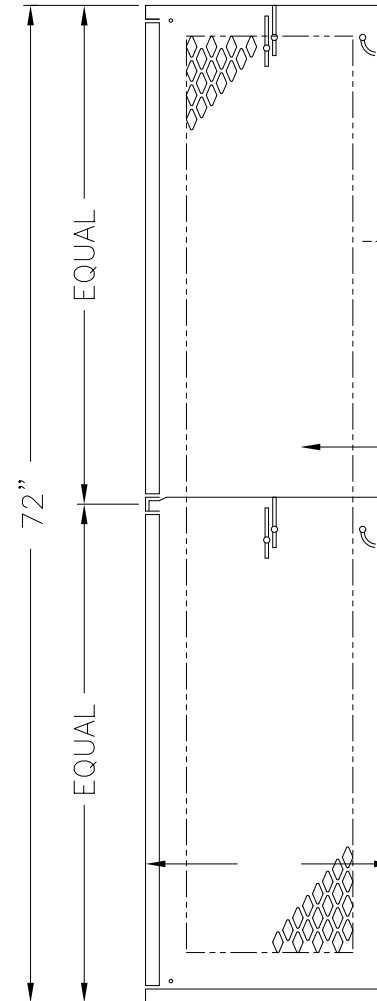

BOLT WELDED LOCKER
UNITS TOGETHER @ 4
PLACES

16GA. TOP, BOTTOM,
SHELF & DIVISIONS
DIVISION RECEIVES DIAMOND
PERFORATIONS

18GA. BACK

SECTION @ WALL



72" HIGH DOUBLE TIER ALL-WELDED LOCKER

18" & 24" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 18", 21", & 24" DEEP

This drawing shows a standard Penco Product. Any modifications
to the product must be approved by Penco Engineering. 8/6/2001



181872AW2T.dwg

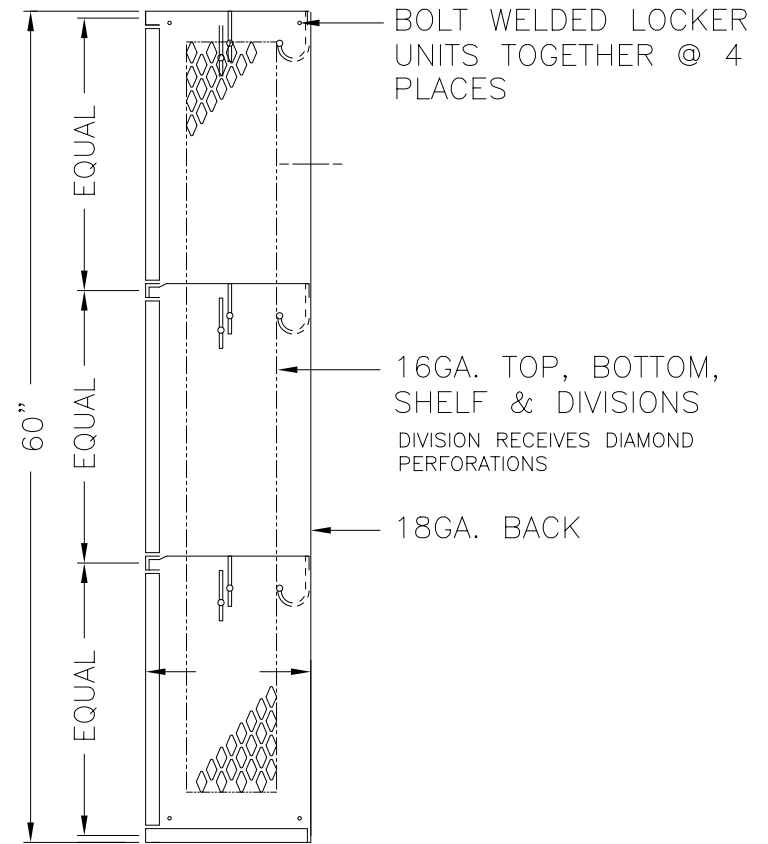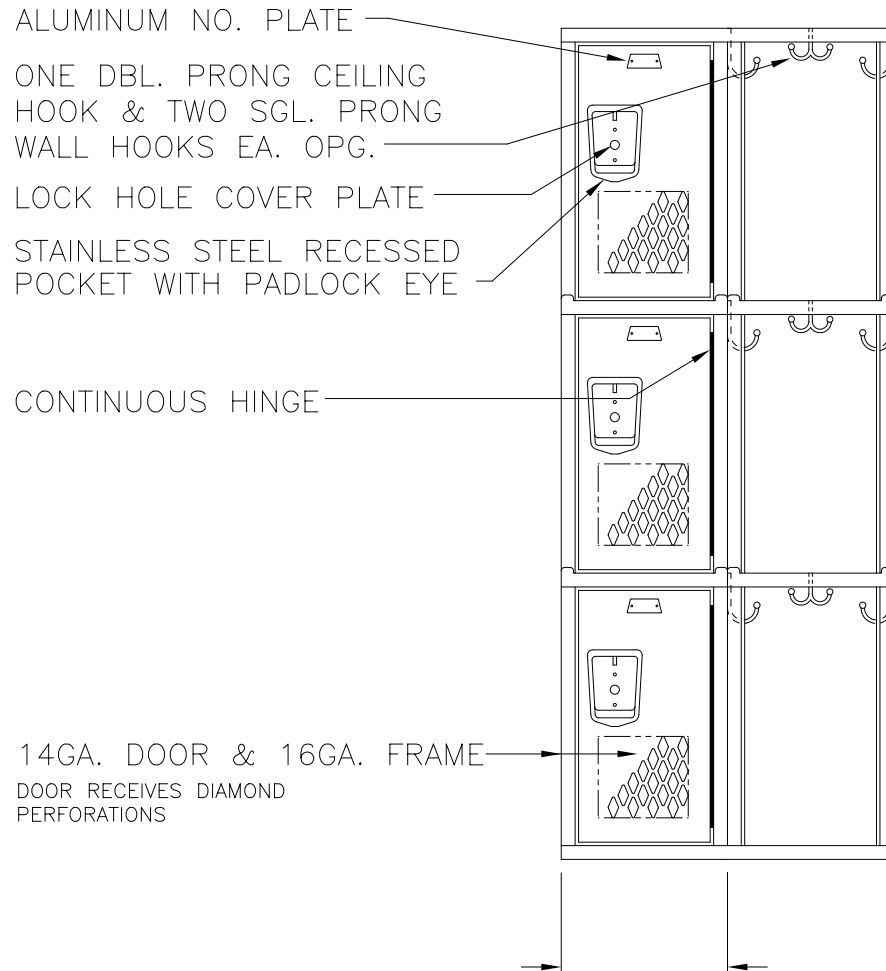

ELEVATION

SECTION @ WALL

60" HIGH TRIPLE TIER ALL-WELDED LOCKER

12" & 15" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 12", 15", 18", 21" & 24" DEEP

This drawing shows a standard Penco Product. Any modifications to the product must be approved by Penco Engineering. 8/6/2001




ALUMINUM NO. PLATE
 ONE DBL. PRONG CEILING
 HOOK & TWO SGL. PRONG
 WALL HOOKS EA. OPG.

LOCK HOLE COVER PLATE


STAINLESS STEEL RECESSED
 POCKET WITH PADLOCK EYE

CONTINUOUS HINGE

14GA. DOOR & 16GA. FRAME
 DOOR RECEIVES DIAMOND
 PERFORATIONS

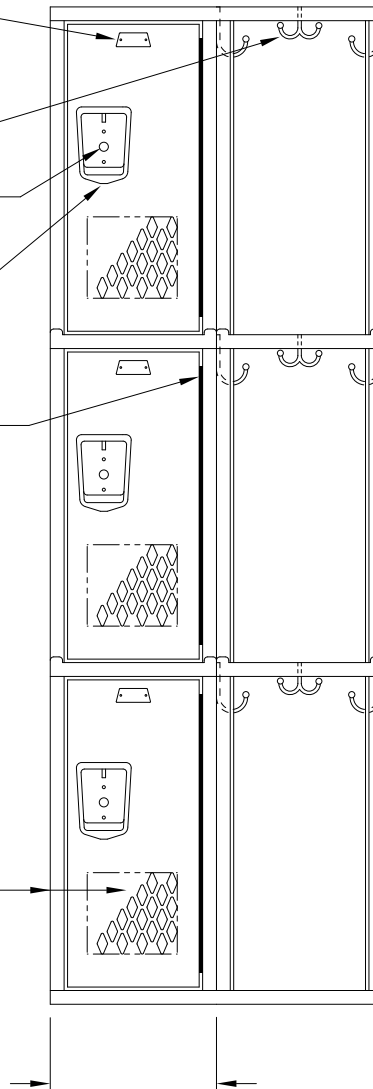

ELEVATION

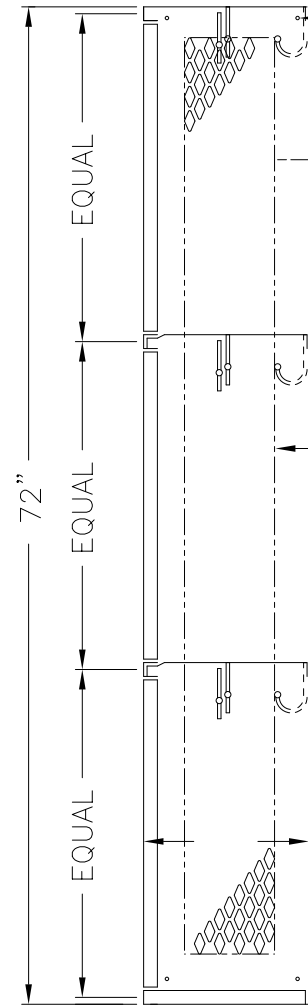

BOLT WELDED LOCKER
 UNITS TOGETHER @ 4
 PLACES

16GA. TOP, BOTTOM,
 SHELF & DIVISIONS
 DIVISION RECEIVES DIAMOND
 PERFORATIONS

18GA. BACK

SECTION @ WALL

72" HIGH TRIPLE TIER ALL-WELDED LOCKER

12" & 15" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 12", 15", 18", 21" & 24" DEEP

ALUMINUM NO. PLATE

ONE DBL. PRONG CEILING
HOOK & FOUR SGL. PRONG
WALL HOOKS EA. OPG.

LOCK HOLE COVER PLATE


STAINLESS STEEL RECESSED
POCKET WITH PADLOCK EYE

CONTINUOUS HINGE


14GA. DOOR & 16GA. FRAME

DOOR RECEIVES DIAMOND
PERFORATIONS

DOOR RECEIVES REINFORCING PAN

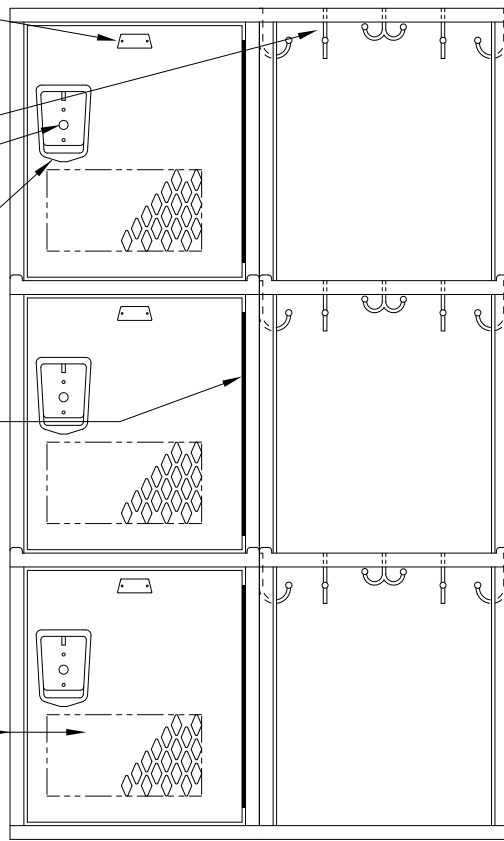

ELEVATION

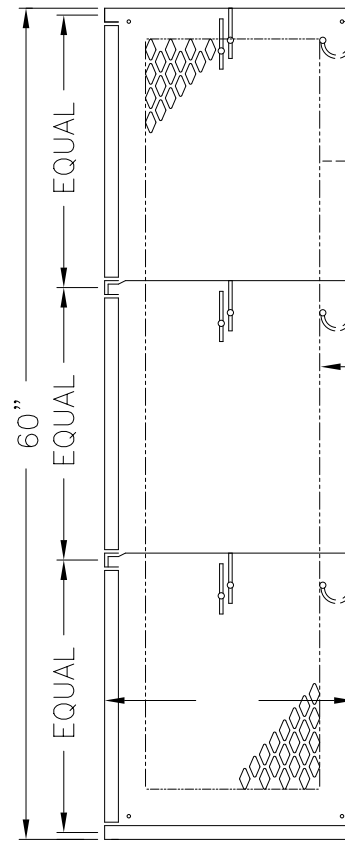

BOLT WELDED LOCKER
UNITS TOGETHER @ 4
PLACES

16GA. TOP, BOTTOM,
SHELF & DIVISIONS
DIVISION RECEIVES DIAMOND
PERFORATIONS

18GA. BACK

SECTION @ WALL

60" HIGH TRIPLE TIER ALL-WELDED LOCKER

18" & 24" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 18", 21" & 24" DEEP

This drawing shows a standard Penco Product. Any modifications
to the product must be approved by Penco Engineering. 8/6/2001



ALUMINUM NO. PLATE

ONE DBL. PRONG CEILING
HOOK & FOUR SGL. PRONG
WALL HOOKS EA. OPENING

LOCK HOLE COVER PLATE



STAINLESS STEEL RECESSED
POCKET WITH PADLOCK EYE

CONTINUOUS HINGE

14GA. DOOR & 16GA. FRAME

DOOR RECEIVES DIAMOND
PERFORATIONS

DOOR RECEIVES REINFORCING PAN

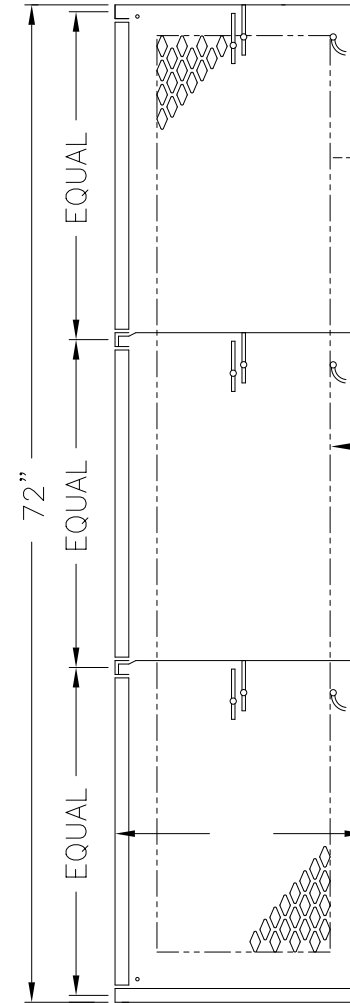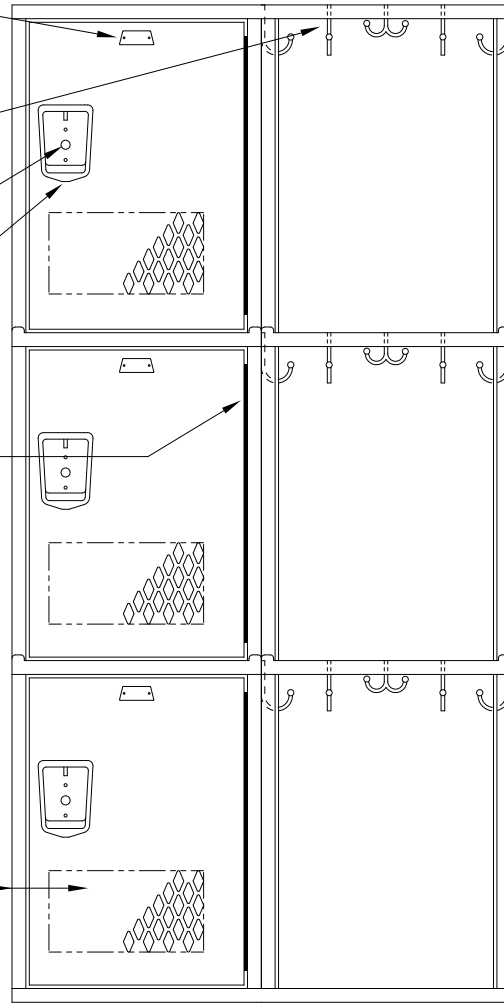

BOLT WELDED LOCKER
UNITS TOGETHER @ 4
PLACES

16GA. TOP, BOTTOM,
SHELF & DIVISIONS
DIVISION RECEIVES DIAMOND
PERFORATIONS

18GA. BACK

ELEVATION

SECTION @ WALL

72" HIGH TRIPLE TIER ALL-WELDED LOCKER

18" WIDE, ALLOW 1/16" CREEPAGE PER FRAME
TYPICAL FOR 18", 21" & 24" DEEP

This drawing shows a standard Penco Product. Any modifications
to the product must be approved by Penco Engineering. 8/6/2001



181872AW3T.dwg